




GE
Lighting

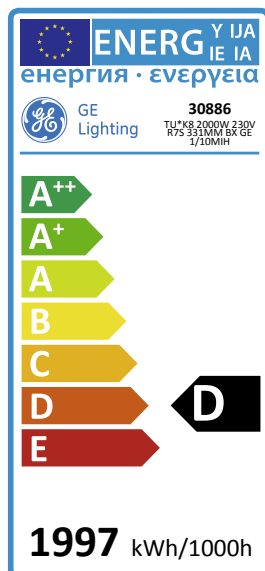

1997
kWh/1000h

D
energy class

22
lumens/watt

Halogen Linear High Watt

TU*K8 2000W 230V R7S 331MM BX GE
1/10MIH

30886

Product information

Housing in a clear quartz bulb, these halogen floodlighting lamps have a ceramic one-pin cap on each end and can be operated on 230V or 240V mains. Linear halogen lamps provide a powerful light source for compact fittings used for floodlighting, architectural lighting and security. GE's linear halogen lamps are double ended, using the universal R7s cap format, and are available in the two industry standards of 118mm or 78mm, plus longer, higher wattage versions.

Application areas

 Hospitality

 Home



Product data

Cap/Base	R7s
Bulb Shape	Tubular
Bulb Diameter [mm]	10
Maximum Overall Length [mm]	332.2
Net weight per piece [g]	26
Gross weight per piece [g]	47
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	44000
Rated efficacy [lm/W]	22
Energy efficiency class (EEC)	D
Rated Life [h]	2000
Weighted energy consumption [kWh/1000h]	1996.1

Electrical data

Nominal power [W]	2000
Rated power [W]	2000.0
Nominal lamp voltage [V]	230
Coil type	C-8
Dimming Capability	Yes

Logistic data

DUN Code	00043168308861
EAN Code	9004102308867
Pack Quantity	10
Layer quantity	180 EUR, 240 UK
Layer quantity EUR	180
Layer quantity UK	240
Pallet quantity EUR (PC)	2520
Pallet quantity UK (PC)	4080
Outer case size	381 x 124 x 60 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Halogen Lamps Spectrum Catalogue \(PDF\)](#)

[Halogen DEQ and IR™ DEQ Lamps Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)