

**37**  
kWh/1000h

**A+**  
energy class

**81**  
lumens/watt

## Biax™ L LongLast™ 4-pin, External Starter Req.

F36W BX/T5/840/4P TU

**93105971**

## Product information

Biax™ L covers a range of single ended compact fluorescent lamps with high lumen output and are available in a wide range: 18, 24, 34, 36, 40, 55 and 80 watt versions. The single ended design is less than half the length of standard fluorescent lamps. This makes Biax™ L the ideal choice for modular luminaires. The range is available in colours of 2700, 3000, 3500, and 4000K allowing use in most environments. All Biax™ L lamps have a CRI of 82. The family of Biax™ L lamps offers a rated life\* of 10,000 hours for 18W to 36W and 20,000 hours for 40, 55 and 80W. The 40, 55 and 80W versions are for use on high-frequency electronic gear only.

- at 3 hours per start

Long single biaxial tubes

## Application areas



Office



Industrial





Biax™ L LongLast™ 4-pin, External Starter

Req.

F36W BX/T5/840/4P TU

93105971

Product data

Product Code	93105971
Bulb Shape	Biax Plug-in
Bulb maximum overall diameter [mm]	43.8
Maximum Overall Length [mm]	421.8
Net weight per piece [g]	151
Gross weight per piece [g]	184
Operating position	U - Universal
Mercury Content [mg]	3
UV radiance	exempt
Brand	Tungsram
Cap/Base	2G11

Performance data

Colour Code	840
Rated Lumens [lm]	2900
Weighted energy consumption [kWh/1000h]	36.52
Energy efficiency class (EEC)	A+
Rated Life [h]	10000
Nominal correlated colour temperature (CCT) [K]	4000
Nominal lumens [lm]	2900
Colour Rendering Index (CRI) [Ra]	82



Biax™ L LongLast™ 4-pin, External Starter

Req.

F36W BX/T5/840/4P TU

93105971



Electrical data

Rated power [W]	33.2
Operating Temperature (MIN) [°C]	-15
Starting ambient temperature range	-15
Dimming Capability	Yes
Nominal power [W]	36
Nominal lamp voltage [V]	106


Logistic data

Shipment	Standard
DUN Code	15994100011153
EAN Code	5994100011156
Pack Quantity	25
Layer quantity	325 EUR, 450 UK
Layer quantity EUR	325
Layer quantity UK	450
Pallet quantity EUR (PC)	1300
Pallet quantity UK (PC)	1800
Outer case size	453 x 141 x 242 (mm)
Product status	Available

Technical drawing

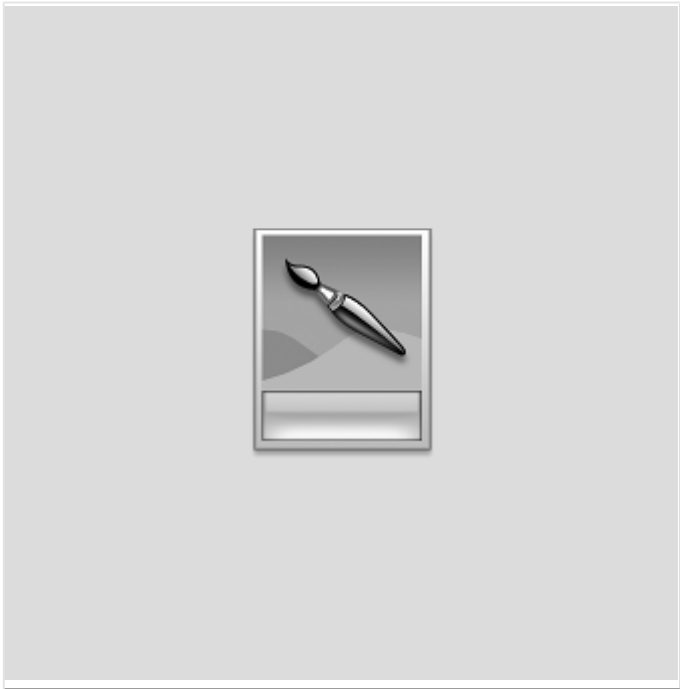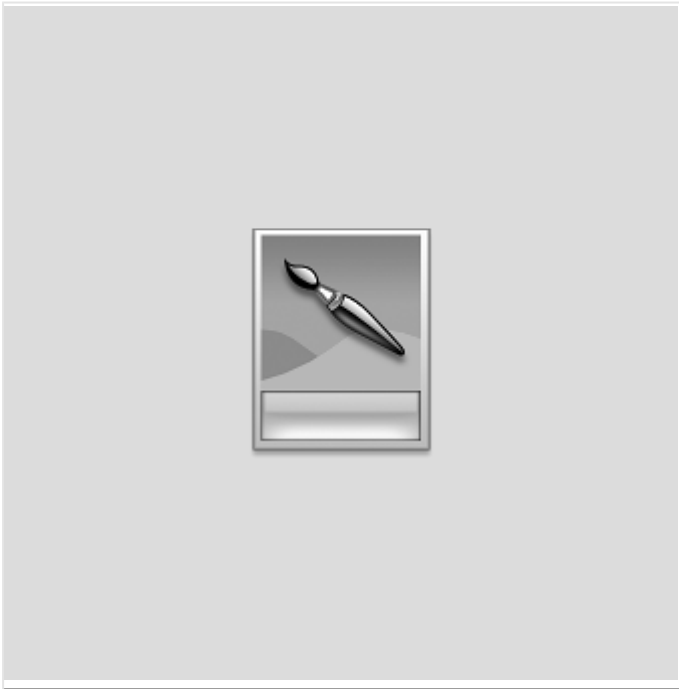

## Survival data

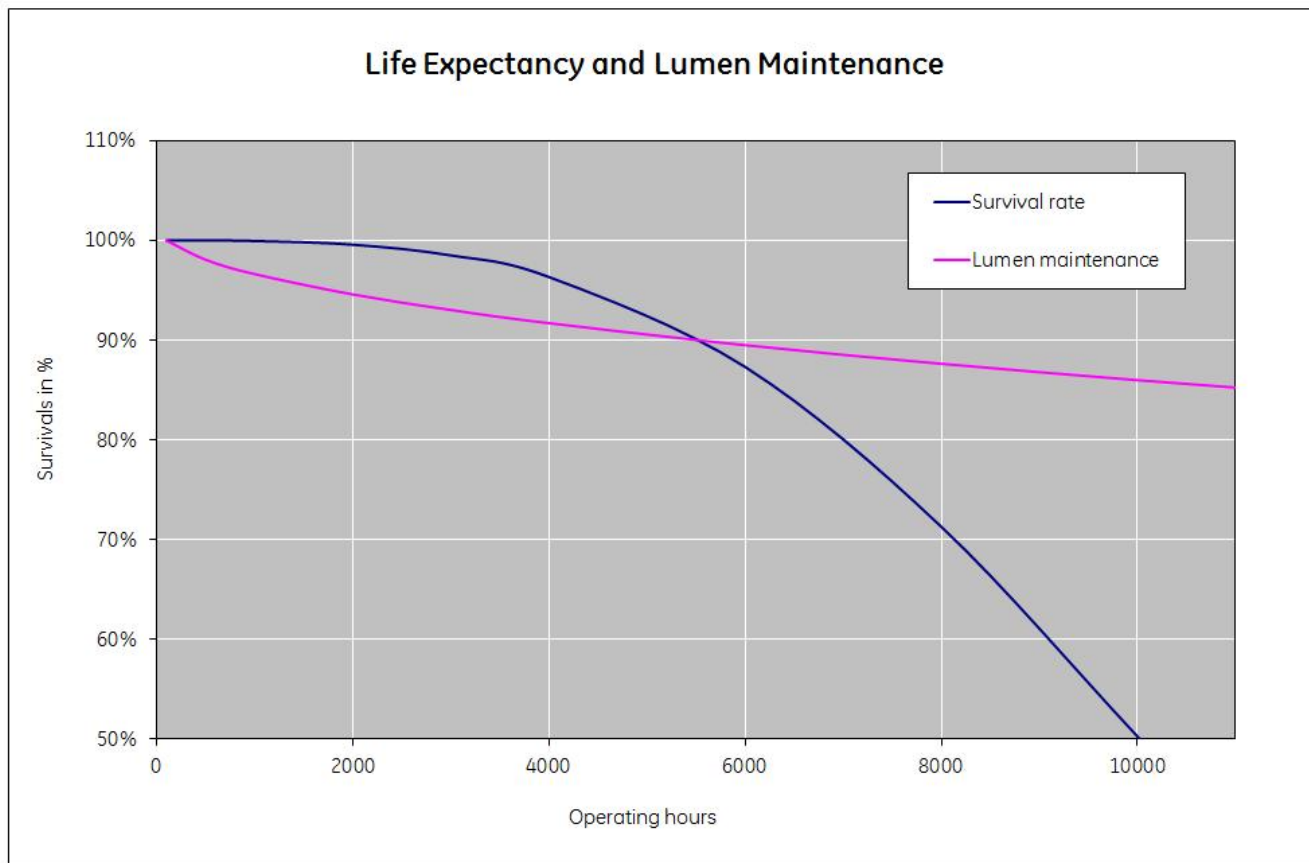

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[CFL Non-Integrated Spectrum Catalogue \(PDF\)](#)

[LongLast™ Biax™ L Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)