

Lynx-LE

LYNX-LE 40W/865 10-WAY

0025664



Range features



PRODUCT OVERVIEW

Light colour	865
Technology	Compact Fluorescent
Ordering number	0025664
Energy class	A
Average life (Rated) (h)	20000
Lamp shape	Stick
Dimmable	Referring to ballast
Cap/Base	2G11
Type	Lynx LE
EAN code	5410288256641
CRI (Ra)	82
Colour temperature (K)	6500
Luminous flux (Rated) (lm)	3050
Watt (Nominal) (W)	40
Voltage (V)	126

Lynx-LE

LYNX-LE 40W/865 10-WAY

0025664

DATA TABLE

General data

Ordering number	0025664
Technology	Compact Fluorescent
Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000
Energy class	A
Lamp shape	Stick
Dimmable	Referring to ballast
Cap/Base	2G11
Type	Lynx LE
EAN code	5410288256641
Product name	LYNX-LE 40W/865 10-WAY
Lamp mercury content (mg)	<3.0
Starting time (max) (s)	<0.1
Warm-up time to 60% of full light (max) (s)	60
Control gear required	Yes
IEC Reference	IEC 60901
IEC Reference 2	IEC 61199
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	Electronic Ballast
Sales pack quantity	10
Rated survival factor at 2000 h 50Hz	0.99
Rated survival factor at 4000 h 50Hz	0.98
Rated survival factor at 6000 h 50Hz	0.95
Rated survival factor at 8000 h 50Hz	0.88
Rated survival factor at 12000 h 50Hz	0.87
Rated survival factor at 16000 h 50Hz	0.78
Rated survival factor at 20000 h 50Hz	0.6

Lynx-LE

LYNX-LE 40W/865 10-WAY

0025664

Optical data

Light colour	865
CRI (Ra)	82
Colour temperature (K)	6500
Luminous flux (Rated) (lm)	3050
Luminous flux (Nominal) (lm)	3050
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h 50Hz	9000%
Rated lumen maint. factor at 4000 h 50Hz	8400%
Rated lumen maint. factor at 6000 h 50Hz	8200%
Rated lumen maint. factor at 8000 h 50Hz	8100%
Rated lumen maint. factor at 12000 h 50Hz	79
Rated lumen maint. factor at 16000 h 50Hz	78
Rated lumen maint. factor at 20000 h 50Hz	72

Electrical data

kWh per 1000 hours burning time	44
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	75
Watt (Rated) (W)	40
Watt (Nominal) (W)	40
Voltage (V)	126
Ignition voltage (V)	350
Current (A)	0.32

Physical data

Weight (kg)	0.15
Length base to base (mm) - A	No
Lamp Length (mm) - C/L	539.9
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	55.20 x 4.50 x 2.50
Inner package dimensions (L x W x H) (cm)	56.20 x 10.00 x 14.00
Inner package net weight (kg)	1.50
Outer package dimensions (L x W x H) (cm)	53.00 x 58.50 x 16.50


Lynx-LE

LYNX-LE 40W/865 10-WAY

0025664

TECHNICAL DRAWINGS

2G11

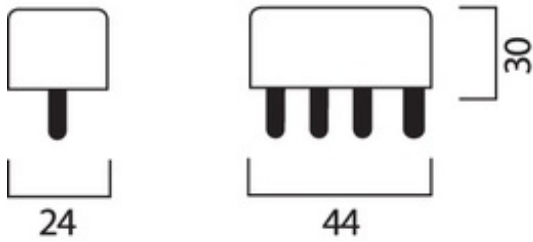

ENERGY LABEL

