


# TUNGSRAM™

Innovation is our heritage  
EST. 1896

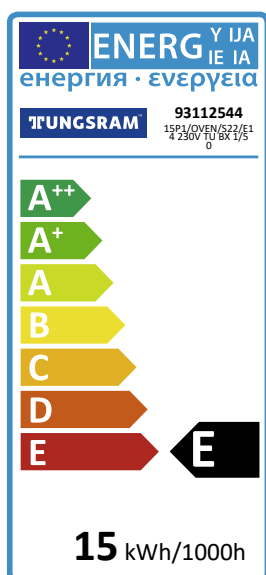

15  
kWh/1000h

E  
energy class

6  
lumens/watt

## Pygmy - Oven (INC)

15P1/OVEN/S22/E14 230V TU BX 1/50

93112544

## Product information

GE incandescent lamps trace their ancestry to the world's first practical electric bulb, invented by Thomas Alva Edison, founder of General Electric Company, in 1879.

Available in all shapes and sizes, they offer particular qualities of light to suit specific applications.

## Product data

Product Code	93112544
Bulb Shape	Pygmy
Bulb Finish	Clear
Bulb Diameter [mm]	22.5
Maximum Overall Length [mm]	49
Net weight per piece [g]	11
Gross weight per piece [g]	12
Dimmability	Yes
Brand	Tungsram
Cap/Base	E14

## Performance data

Rated Lumens [lm]	85
Weighted energy consumption [kWh/1000h]	15.0
Rated efficacy [lm/W]	5.7
Energy efficiency class (EEC)	E
Rated Life [h]	1000
Nominal lumens [lm]	85

## Electrical data

Rated power [W]	15.0
Nominal power [W]	15.0
Nominal lamp voltage [V]	240

## Logistic data

DUN Code	15994100030918
EAN Code	5994100030911
Pack Quantity	50
Inner pack type	BX
Outer pack type	OB
Layer quantity EUR	1350
Layer quantity UK	1800
Pallet quantity EUR (PC)	18900
Pallet quantity UK (PC)	25200
Outer case size	250x130x70mm
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)