


TUNGSRAM™

Innovation is our heritage
EST. 1896

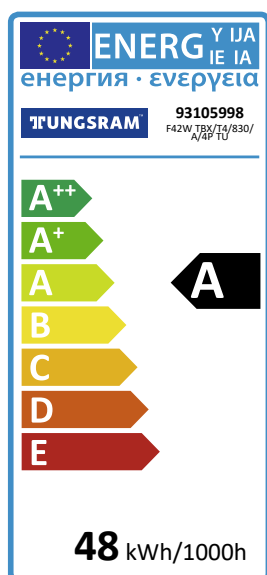

48
kWh/1000h

A
energy class

76
lumens/watt

Biax™ T/E LongLast™ 4-pin with Amalgam, External Starter Req.

F42W TBX/T4/830/A/4P TU

93105998

Product information

Ultra compact energy saving CFL lamps with triple-tube design give an ideal light source for small fixtures and downlighters. Biax™ T lamps allow more compact fixture designs with the same lumen output as Biax™ D lamps. They can also be used to deliver higher lumen output from existing designs. The Biax™ T & T/E lamps are electrically interchangeable with Biax™ D and D/E lamps. They are available in 13, 18, 26, 32 and 42W. Light output ranges between 900 and 3200 lumens. Biax™ T/E lamps with a 4-pin electrical connection and without an internal starter are designed for high-frequency electronic ballasts. The use of separate electronic ballasts makes them suitable for almost every kind of energy supply: high and low voltages, accumulators, batteries, solar cells and systems that can be dimmed.

Triple biaxial tubes





Biax™ T/E LongLast™ 4-pin with Amalgam,
External Starter Req.
F42W TBX/T4/830/A/4P TU
93105998

Application areas



Office



Industrial



Biax™ T/E LongLast™ 4-pin with Amalgam,
External Starter Req.
F42W TBX/T4/830/A/4P TU
93105998

Product data

Product Code	93105998
Bulb Shape	Hex plug-in
Bulb maximum overall diameter [mm]	49.3
Maximum Overall Length [mm]	163.2
Net weight per piece [g]	113
Gross weight per piece [g]	138
Operating position	U - Universal
UV radiance	exempt
Brand	Tungsram
Cap/Base	GX24q-4

Performance data

Colour Code	830
Rated Lumens [lm]	3200
Weighted energy consumption [kWh/1000h]	47.3
Energy efficiency class (EEC)	A
Rated Life [h]	99999999
Rated median life on electronic (HF / ECG) ballast on IEC 12-hour cycle	20000
Rated median life on electronic (HF / ECG) ballast on IEC 3-hour cycle	17000
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	3200
Colour Rendering Index (CRI) [Ra]	82



Biax™ T/E LongLast™ 4-pin with Amalgam,
External Starter Req.
F42W TBX/T4/830/A/4P TU
93105998

Electrical data

Rated power [W]	43.0
Operating Temperature (MIN) [°C]	-15
Starting ambient temperature range	-15
Startup time [sec]	0.1
Dimming Capability	Yes
Nominal power [W]	42
Nominal lamp voltage [V]	135

Logistic data

Shipment	Standard
DUN Code	15994100011429
EAN Code	5994100011422
Pack Quantity	10
Layer quantity	330 EUR, 410 UK
Layer quantity EUR	330
Layer quantity UK	410
Pallet quantity EUR (PC)	1980
Pallet quantity UK (PC)	2050
Outer case size	261 x 108 x 178 (mm)
Product status	Available



Biax™ T/E LongLast™ 4-pin with Amalgam,
External Starter Req.


F42W TBX/T4/830/A/4P TU

93105998

Technical drawing



Survival data

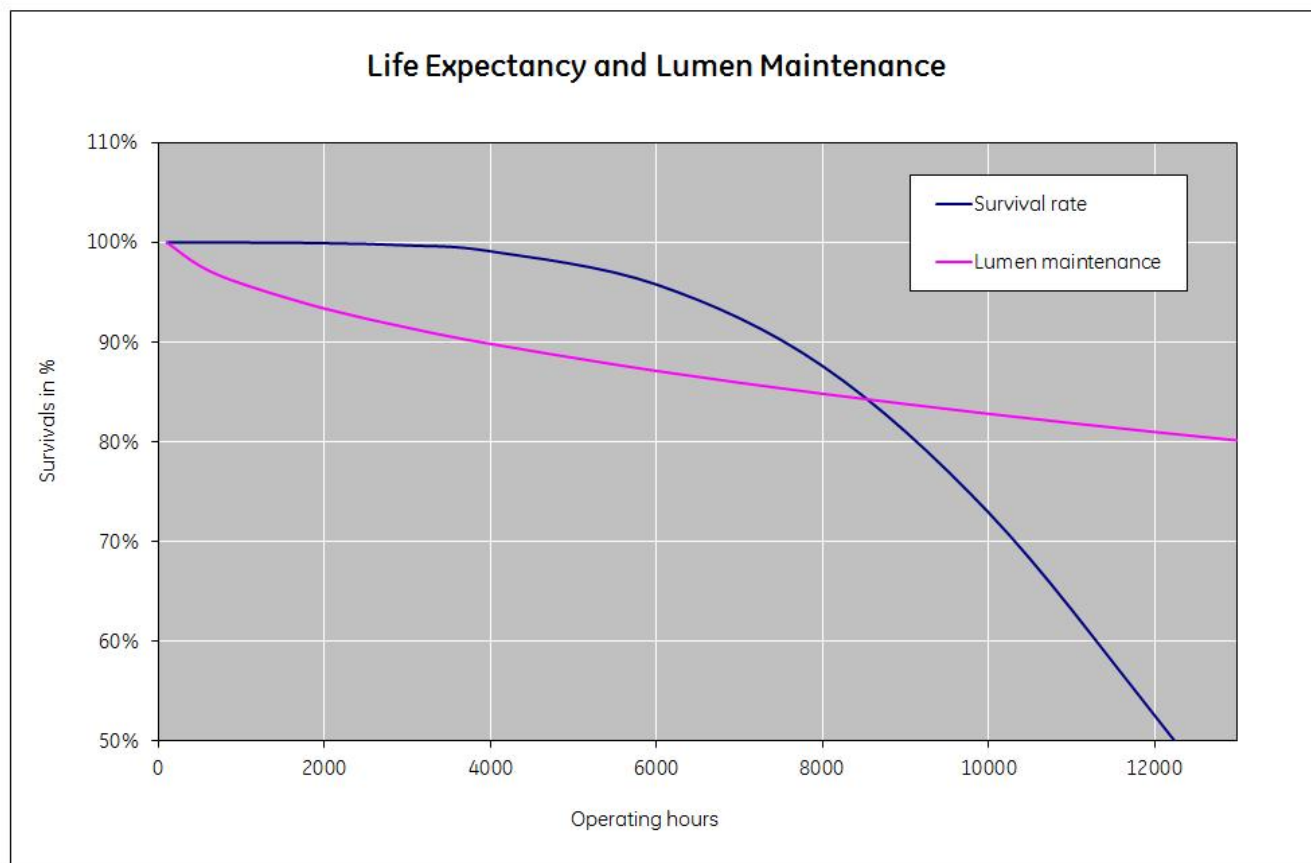

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[CFL Non-Integrated Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)