

Mini-Lynx Candle

ML CANDLE 10KHR 7W E27 827 SLV

0031479



Range features

- Up to 81% energy saving compared to incandescent lamps
- Opal housing delivers all-round illumination whilst hiding burner design
- Provides a flicker-free start within 2 seconds
- Delivers 60% light in less than 120 seconds
- No liquid mercury (<2.5mg pill)
- Good colour rendering (CRI=80)
- Available in Homelight (2700K)
- Average rated life 10,000 hrs
- To be used in dry applications or fully enclosed fixtures



PRODUCT OVERVIEW

Light colour	827 Homelight
Technology	Compact Fluorescent
Ordering number	0031479
Average life (Rated) (h)	10000
Energy class	A
Lamp shape	Candle
Lamp finish	Frosted
Dimmable	No
Cap/Base	E27
Type	Mini-Lynx Candle
EAN code	5410288314792
CRI (Ra)	80
Colour temperature (K)	2700
Luminous flux (Rated) (lm)	300
Watt (Nominal) (W)	7
Equivalent watt (W)	30
Voltage (V)	230

Mini-Lynx Candle

ML CANDLE 10KHR 7W E27 827 SLV

0031479

DATA TABLE

General data

Dry applications use only	Yes
Technology	Compact Fluorescent
Ordering number	0031479
Energy saving lamp	Yes
Energy class	A
Average life (Rated) (h)	10000
Average life (Nominal) (h)	10000
Lamp finish	Frosted
Lamp shape	Candle
Dimmable	No
Cap/Base	E27
Type	Mini-Lynx Candle
EAN code	5410288314792
E-number FI	4940172
Long description	Up to 81% energy saving compared to incandescent lamps. Opal housing delivers all-round illumination whilst hiding burner design. Provides a flicker-free start within 2 seconds. Delivers 60% light in less than 120 seconds. No liquid mercury (<2.5mg pill). Good colour rendering (CRI=80). Available in Homelight (2700K). Average rated life 10,000 hrs. To be used in dry applications or fully enclosed fixtures
Product name	ML CANDLE 10KHR 7W E27 827 SLV
Lamp mercury content (mg)	<2.5
Starting time (max) (s)	< 2.0
Warm-up time to 60% of full light (max) (s)	120 s
Control gear required	No
Burning position	Universal
IEC Reference	IEC 60968
IEC Reference 2	IEC 60969
IEC Reference 3	IEC 55015
ILCOS code	FBABH-7/27/1b-E27-39/105
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 10000
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Optimal operating condition (°C)	25° C, cap-up, Stated lumen output may vary if operated in non-standard position

Mini-Lynx Candle

ML CANDLE 10KHR 7W E27 827 SLV

0031479

Optical data

Light colour	827 Homelight
CRI (Ra)	80
Colour temperature (K)	2700
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Rated) (lm)	300
Luminous flux (Nominal) (lm)	300
Chromaticity coordinate Y	0.42
Chromaticity coordinate X	0.463

Electrical data

kWh per 1000 hours burning time	7
Equivalent watt (W)	30
Watt (Rated) (W)	7
Watt (Nominal) (W)	7
Voltage (V)	230
Current (A)	0.061
Lamp power factor	> 0.5

Physical data


Weight (kg)	0.03
Lamp Length (mm) - C/L	105
Max. Lamp Diameter (mm) - D	39
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	12.00 x 4.80 x 4.80
Inner package dimensions (L x W x H) (cm)	30.00 x 14.10 x 15.00
Inner package net weight (kg)	0.31
Outer package dimensions (L x W x H) (cm)	74.50 x 32.00 x 18.00

Mini-Lynx Candle

ML CANDLE 10KHR 7W E27 827 SLV

0031479

TECHNICAL DRAWINGS

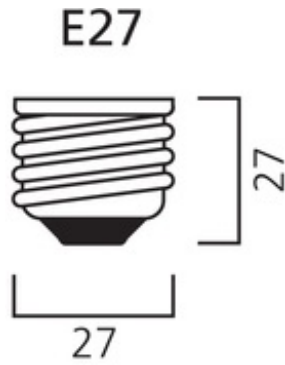

ENERGY LABEL

