



ConstantColorTM CMH Single Ended Mini CMH35/TC/UVC/U/942/G8.5

26348

Product information

GE's low watt **CMH lamps** have opened new possibilities for lighting design, combining the power and light quality of far larger and less efficient lamps. It is now possible to achieve lighting design that could not be achieved previously with inferior technologies.

GE's new **ConstantColorTM CMH PreciseTM** technology platform has been developed with specific focus to retail applications. GE PreciseTM technology offers superb overall light quality, outstanding lumen maintenance, improved efficacy, whihle maintaining long life and reliability. These qualities are why GE is the leader in ceramic metal halide technology.









Product data

Bulb Shape TC Bulb Finish Clear Maximum Overall Length [mm] S2 Net weight per piece [g] Gross weight per piece [g] Operating position U - Universal Mercury Content [mg] TC U - Universal	Cap/Base	G8.5
Maximum Overall Length [mm]85Light Center Length [mm]52Net weight per piece [g]9Gross weight per piece [g]18Operating positionU - Universal	Bulb Shape	TC
Light Center Length [mm] 52 Net weight per piece [g] 9 Gross weight per piece [g] 18 Operating position U - Universal	Bulb Finish	Clear
Net weight per piece [g] Gross weight per piece [g] Operating position 9 U - Universal	Maximum Overall Length [mm]	85
Gross weight per piece [g] 18 Operating position U - Universal	Light Center Length [mm]	52
Operating position U - Universal	Net weight per piece [g]	9
- · · · · · · · · · · · · · · · · · · ·	Gross weight per piece [g]	18
Mercury Content [mg] 4.65	Operating position	U - Universal
	Mercury Content [mg]	4.65
UV radiance Exempt	UV radiance	Exempt
Brand General Electric (GE)	Brand	General Electric (GE)

Performance data

Colour Code	942
Colour Rendering Index (CRI) [Ra]	88
Nominal correlated colour temperature (CCT) [K]	4200
Nominal lumens [lm]	3200
Rated Lumens [lm]	3390
Nominal efficacy [LpW]	91
Rated efficacy [LpW]	84.3
Energy efficiency class (EEC)	А
Nominal chromaticity coordinate X	0.375
Nominal chromaticity coordinate Y	0.37
Weighted energy consumption [kWh/1000h]	44.24



Electrical data

Nominal power [W]	35
Rated power [W]	40.2
Nominal lamp voltage [V]	90
Lamp Current [A]	0.4
Design Ambient Temperature [°C]	25
Run-up time (sec)	180
Hot restart time (sec)	240
Ballast Required	Yes

Logistic data

DUN Code	10043168263488
EAN Code	0043168263481
Pack Quantity	12
Inner pack type	BOX
Layer quantity	396 EUR, 504 UK
Layer quantity EUR	396
Layer quantity UK	504
Pallet quantity EUR (PC)	2772
Pallet quantity UK (PC)	3528
Outer case size	186 × 146 × 140 (mm)
Product status	Available

Application areas











Lumen maintenance data

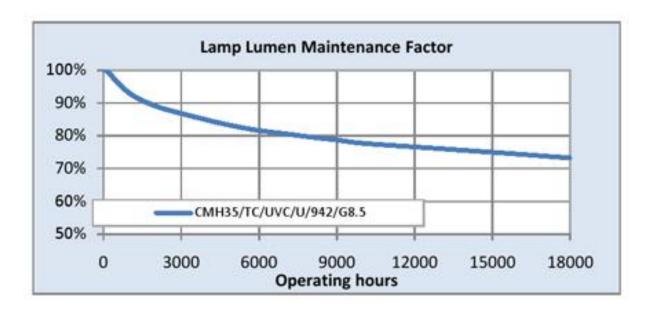

Survival Data

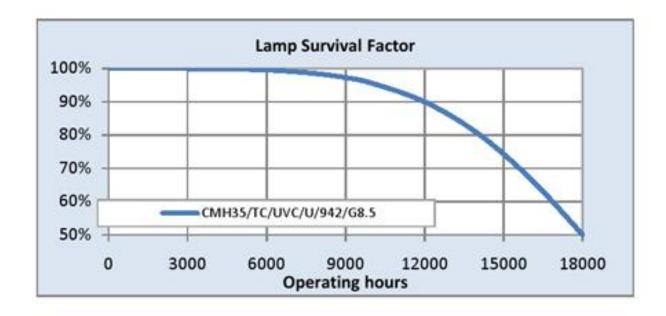





ConstantColorTM CMH Single Ended Mini CMH35/TC/UVC/U/942/G8.5

26348

Downloads & Links

Go to the catalog site (HTTP)

HID Lamps Spectrum Catalogue (EN) (PDF)

ConstantColor™ CMH Ultra Brochure (PDF)

ConstantColor™ White Light CMH Brochure (PDF)

ConstantColor™ CMH G8.5 Mini Data sheet (PDF)

Lighting design tools & calculators (HTTP)