

16 - 30



GE Start GU10 LED3/GU10/840/100-240V/35/BX 1/8 **84608**

Product information

This new entry level range of highly competitive LED GU10 products consume only 3W and 4.5W respectively and offer a fantastic energy saving alternative to 35W and 50W Halogen GU10 lamps.

Application areas





(B) Hospitality

合 Home





(E 📓



Product data

Cap/Base	GU10
Bulb Shape	PAR
Bulb Finish	Silver
Bulb Diameter [mm]	50
Bulb maximum overall diameter [mm]	50.2
Maximum Overall Length [mm]	57
Net weight per piece [g]	30
Gross weight per piece [g]	63
Brand	General Electric (GE)

Performance data

80
4000
6 steps
35
35
550
550
250
270
250
270
A++
15000
3





Electrical data

Nominal power [W]	3
Rated power [W]	3.0
Nominal lamp power factor	0.5
Nominal lamp voltage [V]	230
Lamp Current [A]	45mA@120V/ 30mA@230V
Operating Temperature (MAX) [°C]	40
Run-up time (sec)	<1s
Starting time (sec)	<0.2s
Number of switching cycles	25000
Dimming Capability	No


Logistic data

DUN Code	10043168846087
EAN Code	0043168846080
Pack Quantity	8
Inner pack type	HANGING BOX
Outer pack type	TRAY OUTER
Layer quantity	216 EUR, 312 UK
Layer quantity EUR	216
Layer quantity UK	312
Pallet quantity EUR (PC)	2808
Pallet quantity UK (PC)	4056
Outer case size	230x118x70 mm
Product status	Available





Technical drawing

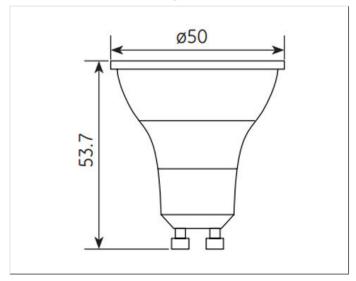

Downloads & Links

Go to the catalog site (HTTP)

Product datasheet (PDF)

LED Lighting Solutions - Catalogue (PDF)

Lighting design tools & calculators (HTTP)

GU10 range Datasheets (HTTP)

High-res images / Technical drawings (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)