



SORAA VIVID™

Soraa VIVID lamps offer beautiful and accurate color and white rendering across the entire visible spectrum, mimicking the natural range of sunlight to deliver unmatched quality of light for color critical applications.

POINT SOURCE OPTICS™

Point Source Optics deliver exceptional beam quality with crisp shadows, perfect uniformity and precisely controlled beam distributions from 10° to 60°.

SORAA VIVID COLOR™

Soraa VIVID lamps utilize full spectrum light to provide industry-leading color rendition of CRI/95, R9/95, Rf/90, Rg/100 for precise color reproduction.

SORAA NATURAL WHITE™

Soraa VIVID lamps are engineered to deliver outstanding whiteness rendering for true-to-life whites, which matches or exceeds incandescent sources at 2700K and 3000K.

ENERGY EFFICIENCY

85% more energy efficient than standard halogen lamps, with typical payback of one year or less.

GENERAL SPECIFICATIONS

Form Factor

Width: 49.9mm (1.96")

Height: 53.5mm (2.10")

Weight: 61g

Operating Temperature

Minimum: -40°C (ambient)

Typical: 85°C - 95°C (base)

Maximum: 100°C (base)

Electrical

Wattage: 7.5W

Power factor: 0.80

Voltage: 230V +/- 23V

Frequency: 50/60Hz

Dimming

Please reference our compatibility chart for dimmer and transformer information.

MR16 GU10 7.5W 230V

Output	390 - 455 lumen
Beam Angle	10°, 25°, 36°, 60°
Color Temperature	2700K, 3000K, 4000K
Color Metrics	CIE Metrics: CRI 95, R9 95 TM30 Metrics: Rf 90, Rg 100 Whiteness Index: Rw 100
Applications	Hotels & Hospitality Galleries & Museums High-End Retail



ACCESSORIES

Narrow spot compatible with the Soraa SNAP System™.

THERMAL COMPATIBILITY

Suitable for use in fully enclosed fixtures, subject to the maximum heatsink temperature limits stated in this data sheet. Designed to safely turn down in high temperature environments to protect LED and components.

ELECTRICAL COMPATIBILITY

Compatible with trailing edge phase cut dimmers only.
Not for use with leading edge dimmers
Check individual lamp website pages for compatibility data.
For more information visit: www.soraa.com

INTENDED USE & LOCATION RATING

Intended for use in MR16 GU10 compatible recessed downlights, track lighting and other indoor applications. Suitable for damp locations, not rated for use in wet locations.

This light source produces greater than 2mW/klm of UV light and is intended only for high color and white rendering applications, where the UV light is required to activate optical brightening agents in illuminated objects.

LIFETIME & WARRANTY

Rated lifetime to L70: 35,000hrs

Warranty: 3yrs or 25,000hrs whichever comes first

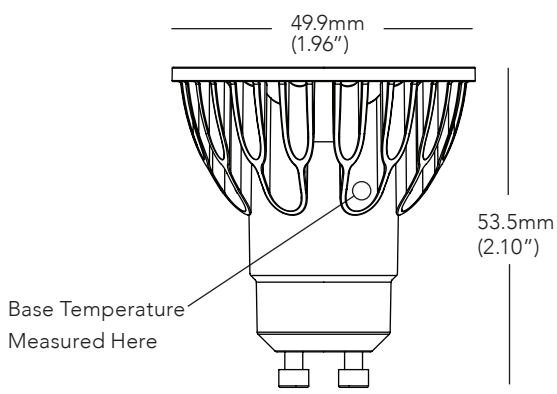
For warranty information visit: www.soraa.com/resources/legal




RoHS



DIMENSIONS




COLOR RENDERING

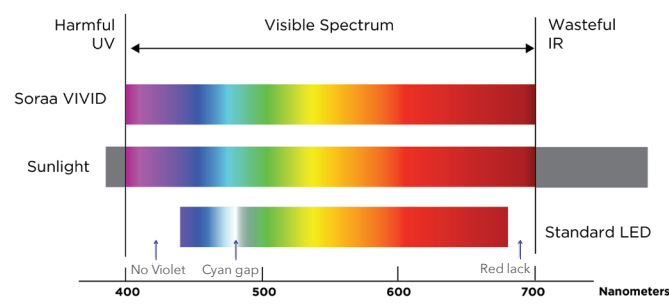

10 DEGREE BEAM

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.2	0.4	100%
0.3	0.7	25%
0.5	1.1	11%
0.7	1.4	6%
0.9	1.8	4%

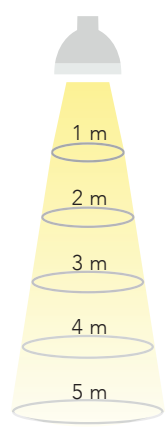


25 DEGREE BEAM

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.4	0.7	100%
0.9	1.5	25%
1.3	2.2	11%
1.8	2.9	6%
2.2	3.6	4%

60 DEGREE BEAM

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
1.2	1.8	100%
2.3	3.6	25%
3.5	5.4	11%
4.6	7.2	6%
5.8	9.0	4%

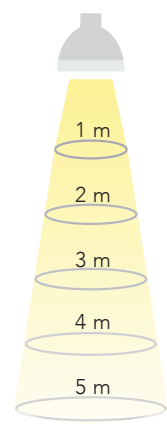







Note: Lux may be calculated by multiplying the Peak Intensity of the desired model number by the percentage in the tables above

SPECIFICATIONS BY MODEL NUMBER* SORAA LED MR16-GU10 7.5W 230V

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	Peak Intensity	Total Flux (Lm)	90° Lumens	Efficacy (Lm/W)	McA	SNAP
VIVID SERIES										
SM16GW-07-10D-927-03-S3	01075	2700	10	17	5710	390	345	52	3	YES
SM16GW-07-25D-927-03-S3	01087	2700	25	38	2260	410	385	55	3	-
SM16GW-07-36D-927-03-S3	01099	2700	36	54	1070	410	375	55	3	-
SM16GW-07-60D-927-03-S3	01585	2700	60	84	420	410	375	55	3	-
SM16GW-07-10D-930-03-S3	01079	3000	10	17	6000	410	360	55	3	YES
SM16GW-07-25D-930-03-S3	01091	3000	25	38	2400	435	410	58	3	-
SM16GW-07-36D-930-03-S3	01103	3000	36	54	1130	435	400	58	3	-
SM16GW-07-60D-930-03-S3	01589	3000	60	84	440	435	400	58	3	-
SM16GW-07-10D-940-03-S3	01081	4000	10	17	6290	430	380	57	4	YES
SM16GW-07-25D-940-03-S3	01093	4000	25	38	2510	455	430	61	4	-
SM16GW-07-36D-940-03-S3	01105	4000	36	54	1190	455	415	61	4	-
SM16GW-07-60D-940-03-S3	01591	4000	60	84	460	455	415	61	4	-

CCT: Correlated Color Temperature McA: White Point Accuracy in McA step SNAP: SORAA SNAP System Compatible

*Specifications are at stable warm operating conditions (25°C ambient)

CCT	SPECTRAL POWER DISTRIBUTION	COLOR QUALITY METRICS	COLOR ACCURACY												
VIVID 2700K	 CRI: 95, R9: 95	<table><tr><td>CRI</td><td>95</td></tr><tr><td>R9</td><td>95</td></tr><tr><td>Rf</td><td>95</td></tr><tr><td>Rg</td><td>100</td></tr><tr><td>Rf-h1</td><td>95</td></tr><tr><td>Rw</td><td>90</td></tr></table>	CRI	95	R9	95	Rf	95	Rg	100	Rf-h1	95	Rw	90	
CRI	95														
R9	95														
Rf	95														
Rg	100														
Rf-h1	95														
Rw	90														
VIVID 3000K	 CRI: 95, R9: 95	<table><tr><td>CRI</td><td>95</td></tr><tr><td>R9</td><td>95</td></tr><tr><td>Rf</td><td>95</td></tr><tr><td>Rg</td><td>100</td></tr><tr><td>Rf-h1</td><td>95</td></tr><tr><td>Rw</td><td>90</td></tr></table>	CRI	95	R9	95	Rf	95	Rg	100	Rf-h1	95	Rw	90	
CRI	95														
R9	95														
Rf	95														
Rg	100														
Rf-h1	95														
Rw	90														
VIVID 4000K	 CRI: 95, R9: 95	<table><tr><td>CRI</td><td>95</td></tr><tr><td>R9</td><td>95</td></tr><tr><td>Rf</td><td>98</td></tr><tr><td>Rg</td><td>100</td></tr><tr><td>Rf-h1</td><td>100</td></tr><tr><td>Rw</td><td>100</td></tr></table>	CRI	95	R9	95	Rf	98	Rg	100	Rf-h1	100	Rw	100	
CRI	95														
R9	95														
Rf	98														
Rg	100														
Rf-h1	100														
Rw	100														