





**GE Start GLS** 

LED13/A67/827/100-240V/B22/F HBX1/6

71130

# **Product information**

A new range of highly competitive LED GLS products with up to an incredible 1500 lumen output. Consuming only 7W, 10W and 13W and 16W power, they are a fantastic energy saving alternative to traditional GLS lamps with new, high quality aesthetics.

#### **Application areas**





(日本) Hospitality







#### **Product data**

Cap/Base	B22d
Bulb Shape	GLS
Bulb Finish	White
Bulb Diameter [mm]	67
Bulb maximum overall diameter [mm]	68
Maximum Overall Length [mm]	141
Net weight per piece [g]	112
Gross weight per piece [g]	181
Brand	General Electric (GE)

# Performance data

Colour Rendering Index (CRI) [Ra]	80
Nominal lumens [lm]	1055
Rated Lumens [lm]	1055
Nominal useful lumens [lm]	1055
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	25000
Weighted energy consumption [kWh/1000h]	13





## **Electrical data**

Nominal power [W]	13
Rated power [W]	13.0
Nominal lamp power factor	0.9
Nominal lamp voltage [V]	230
Lamp Current [A]	0.1495
Operating Temperature (MAX) [°C]	80
Run-up time (sec)	<0.5
Starting time [sec]	<0.5
Number of switching cycles	100000
Dimming Capability	No
Dimming Capability	No


# Logistic data

DUN Code	10043168711309
EAN Code	0043168711302
Pack Quantity	6
Inner pack type	HANGING BOX
Outer pack type	OUTER BOX
Layer quantity	150 EUR, 192 UK
Layer quantity EUR	150
Layer quantity UK	192
Pallet quantity EUR (PC)	630
Pallet quantity UK (PC)	840
Outer case size	247 x 165 x 188 (mm)
Product status	Available





## **Technical drawing**

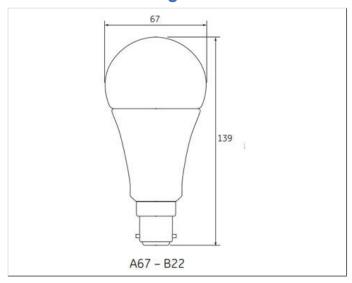

#### **Downloads & Links**

Go to the catalog site (HTTP)
Product datasheet (PDF)

LED Lighting Solutions - Catalogue (EN) (PDF)

**Lighting design tools & calculators (HTTP)** 

Lighting design tools & calculators (HTTP)