

RUBANS LED

# FLASH 120

26,8W - 120 LEDS / M - IP33 - 24Vdc


\*Attention branchement 5 M max en série  
\*Alimentation + gestion de contrôle p.271

| W     | T°    | LM     | RÉFÉRENCES      | DESCRIPTIONS LUMINAIRE                                        |
|-------|-------|--------|-----------------|---------------------------------------------------------------|
| 26,8W | 2700K | 2200lm | SMD5730-270-120 | 5M Ruban LED FLASH120 2835 IP33 120 led/M 2700K 24Vdc 26,8W/M |
| 26,8W | 3000K | 2250lm | SMD5730-300-120 | 5M Ruban LED FLASH120 2835 IP33 120led/M 3000K 24Vdc 26,8W/M  |
| 26,8W | 4000K | 2400lm | SMD5730-400-120 | 5M Ruban LED FLASH120 2835 IP33 120 led/M 4000K 24Vdc 26,8W/M |

| Largeur | Longueur | Hauteur | IP67 NANO | IP65 GAINÉ | IP20 | PWM | SECTION DÉCOUPE |
|---------|----------|---------|-----------|------------|------|-----|-----------------|
| 10mm    | 5M       | 1,7 mm  | X         | X          | ✓    | ✓   | 10cm            |

| 14W   |       |         |
|-------|-------|---------|
| H (m) | D (m) | Em (lx) |
| 1     | 3,30  | 759     |
| 3     | 9,90  | 85      |
| 4     | 13,20 | 47      |
| 5     | 16,50 | 30      |

## DIMENSIONS

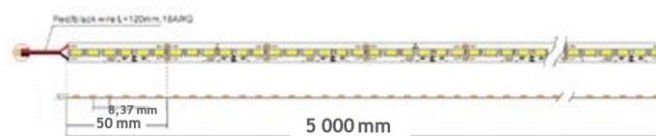

## DONNÉES TECHNIQUES

|           |                     |                         |             |        |
|-----------|---------------------|-------------------------|-------------|--------|
| CE        | RoHS NORME          | TENSION LUMINAIRE 24Vdc | IP33        | IRC 80 |
| SDCM <4   | DURÉE DE VIE 40000H | GARANTIE 2 ans          | 850°        | 1-10V  |
| DIM PHASE | BALI                | PUSH DIM                | LED EPISTAR | 3M A+  |

## OPTIONS

Aucune option.