TUNGSRAM™

Innovation is our heritage
EST. 1896
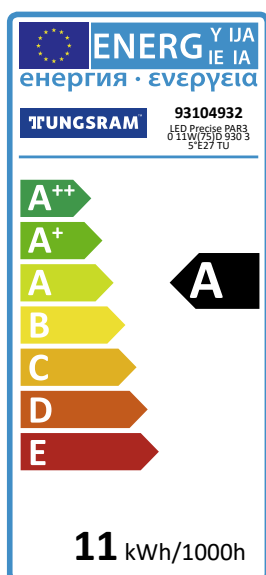
11	A	57
kWh/1000h	energy class	lumens/watt

PAR30 Precise™ Dimmable

LED Precise PAR30 11W(75)D 930 35°E27 TU

93104932

Product information

Designed for retrofit replacement of incandescent PAR30 with maximised energy reduction. Light output and beam spread comparable to commercially available incandescent PAR30 lamps

Application areas

🛍 Retail   📎 Office

👤 Hospitality   🏠 Home

ENERG Y IJA IE IA
енергия · ενεργεια

TUNGSRAM
93104932
LED Precise PAR3
0 11W(75)D 930 3
5°E27 TU

A++
A+
A
B
C
D
E

A

11 kWh/1000h

CE

Product data

Product Code	93104932
Bulb Shape	PAR30
Bulb Finish	Glass
Bulb Diameter [mm]	96
Nominal Length [mm]	93
Maximum Overall Length [mm]	95
Net weight per piece [g]	150
Operating position	Universal
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	E27

Performance data

|	
Nominal/ Rated Beam Angle [°]	35
Colour Code	930
Colour consistency	< 4 SDCM
Nominal center beam candlepower (CBCP) [cd]	1500
Weighted energy consumption [kWh/1000h]	11.0
Rated useful lumens [lm]	630
Energy efficiency class (EEC)	A
Rated life L70/B50 [h]	25000
Nominal correlated colour temperature (CCT) [K]]	3000
Nominal lumens [lm]	630
Colour Rendering Index (CRI) [Ra]	90

Electrical data

Nominal lamp power factor...	>=0.7
Rated power [W]	11.0
Operating Temperature (MIN) [°C]	-20C
Operating Temperature (MAX) [°C]	40C
Starting time (sec)	<0.5
Warm up time up to 60% of full light output	<1
Number of switching cycles	13000
Dimming Capability	Yes
Nominal power [W]	11.0

Logistic data

DUN Code	15994100014727
EAN Code	5994100014720
Pack Quantity	6
Inner pack type	Box
Outer pack type	Outer Box
Product status	Available

Photometric Data
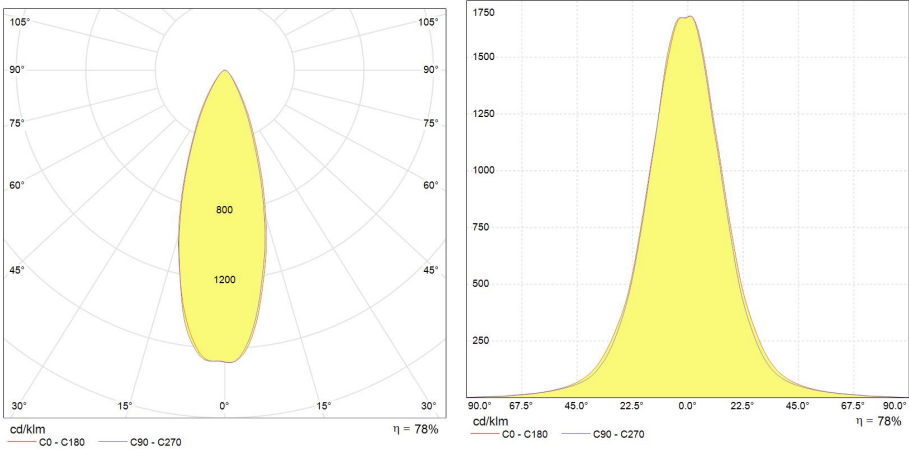
Downloads & Links

Go to the catalog site (HTTP)

Photometry (IES)

Product datasheet (PDF)

Images (HTTP)

Certificate for the Quality Management System of GE Lighting EMEA (PDF)

Certificate for the Environmental Management System of GE Lighting EMEA (PDF)