

TUNGSRAMTM

Innovation is our heritage
EST. 1896


A+
energy class

113
lumens/watt

Edgelit Premium


EPY22-3040-7SR-19L

93054170

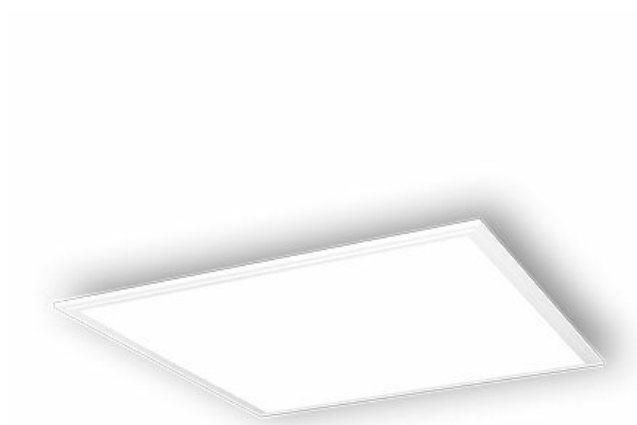

Product information

Tungsräm LED luminaires transform ambient lighting into an exquisite balance of refined appearance and superior efficiency. When illuminated, the panels deliver exceptional uniform light to the space and while off they appear completely free of a visible light source. Designed to replace fluorescent fixtures in suspended T grid ceilings.

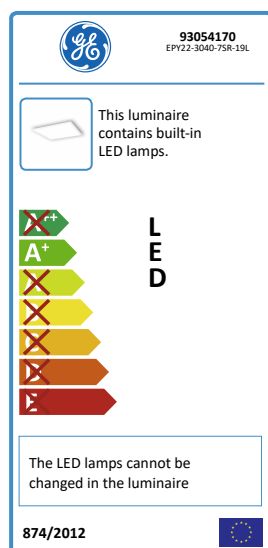

Product data

Mounting type	Recessed
Brand	GE Lighting
IP Rating	40
Certifications	CE/EAC
Body colour	White
Weight [kg]	3.30
DIALux description	TUNGSRAM - Edgelit Premium - 3400lm - 30W - 4000K - 80CRI - 93054170[SKU] - Recessed
IEC protection classes	Class II
Impact resistance (IK)	IK03
Dimensions	595x595x10mm
Energy efficiency class (EEC)	A+

Performance data

Rated life L70/B50 [h]	50000
Operating Voltage	220-240V
Ambient Temperature [°C]	-10°C to +40°C
Rated efficacy [lm/W]	113
Total system power	30
Nominal lumens [lm]	3400
Rated lumens [lm]	3400
Rated power [W]	30
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	80+
UGR value	UGR19

Optical data

Nominal beam angle [°]	Medium (80°)
------------------------	--------------


Electrical data

Nominal lamp power factor	0.9
Controllability	Not dimmable electronic (Static)

Logistic data

Product status	Available
Shipment	Standard

Photometric Data

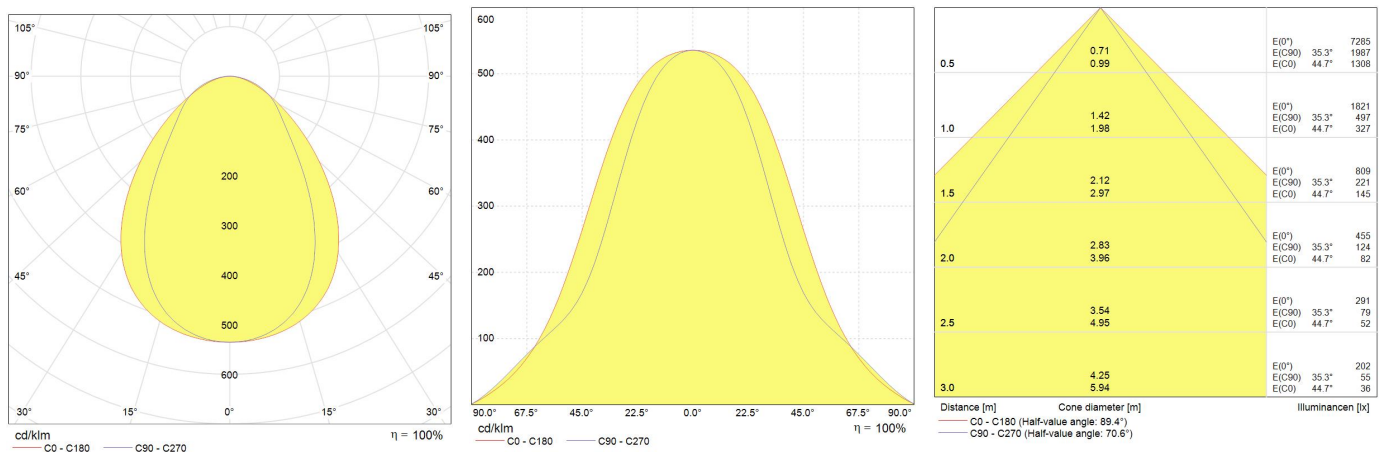

Downloads & Links

- [Go to the catalog site \(HTTP\)](#)
- [Datasheet - TUNGSRAM \(PDF\)](#)
- [Datasheet - GE Lighting \(PDF\)](#)
- [Datasheet - DALI version - GE \(PDF\)](#)
- [Datasheet - ECO version - GE \(PDF\)](#)
- [Installation guide \(PDF\)](#)
- [Images \(HTTP\)](#)
- [Photometry files for EMERGENCY versions \(HTTP\)](#)