
### **TUNGSRAM**

Innovation is our heritage EST. 1896







# Tungsram Bright Stik™ LED 7/STIK/840/100-240/E14/F 3/15 TU 93109513

#### **Product information**

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb and some sockets where a traditional bulb or CFL doesn't fit. Replace a 40W, 60W, 75W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years\*. That's a long time you can spend not worrying about light bulbs.

Features & benefits

- LED technology for energy saving
- Redesigned shape with multiple advantages:
- To fit in more fixtures compared to CFL
- Optimised for omni-directional light distribution
- Space-saving benefits on-shelf
- 240 degree Beam angle
- Replaces a standard 40W, 60W, 75W & 100W bulb
- Rated life of 15 years\*
- 3 colour options 3000K, 4000K & 6500K
- Always ready instant brightness
- No mercury worry-free use and disposal
- Warranty: 2 years with maximum 8 000 burning hours



### Tungsram Bright Stik™ LED 7/STIK/840/100-240/E14/F 3/15 TU 93109513

according to Tungsram Standard Warranty conditions

• Based on 2.7 hours of per day use.



## Tungsram Bright Stik™ LED 7/STIK/840/100-240/E14/F 3/15 TU 93109513

#### Product data

Product Code	93109513
Bulb Shape	T32
Bulb Finish	White
Bulb maximum overall diameter [mm]	32
Nominal Length [mm]	103
Net weight per piece [g]	32
Dimmability	No
RoHS compliant	Yes
Brand	Tungsram
Cap/Base	E14

#### Performance data

Nominal/ Rated Beam Angle [°]	240
Rated Lumens [lm]	600
Weighted energy consumption [kWh/1000h]	7.0
Rated efficacy [lm/W]	85.71
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	10000
Nominal correlated colour temperature (CCT) [K]]	4000
Nominal lumens [lm]	600
Colour Rendering Index (CRI) [Ra]	80


#### Electrical data

Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Starting time (sec)	<0,5 s
Power Factor	>0.5
Warm up time up to 60% of full light output	Instant on
Number of switching cycles	100000
Nominal lamp voltage range [V]	100-240V

#### Logistic data

DUN Code	15994100025969
EAN Code	5994100025962
Pack Quantity	15
Product status	Available

#### Photometric Data

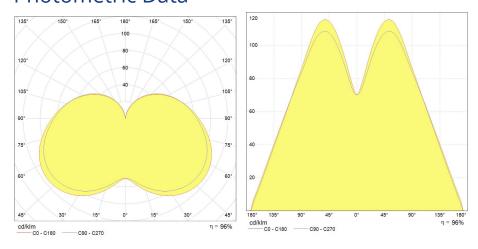



### Tungsram Bright Stik™ LED 7/STIK/840/100-240/E14/F 3/15 TU 93109513

Downloads & Links

Go to the catalog site (HTTP)
Photometry (IES)
Product datasheet (PDF)
Images (HTTP)

