




GE
Lighting

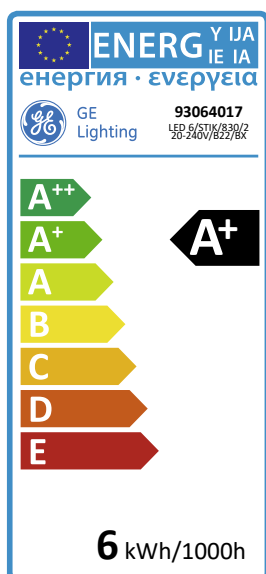

6
kWh/1000h

A+
energy class

78
lumens/watt

GE Bright Stik™

LED 6/STIK/830/220-240V/B22/BX

93064017

Product information

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb - and some sockets where a traditional bulb or CFL doesn't fit. Replace a 40W, 60W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years*. That's a long time you can spend not worrying about light bulbs.

Application areas



Retail



Hospitality



Home

Product data

Product Code	93064017
Bulb Shape	T38
Bulb Finish	White
Bulb maximum overall diameter [mm]	38
Nominal Length [mm]	113.5
Net weight per piece [g]	47
RoHS compliant	Yes
Brand	GE BX
Cap/Base	B22

Performance data

Nominal/ Rated Beam Angle [°]	240
Weighted energy consumption [kWh/1000h]	6
Nominal Initial Lumens per Watt [lm/W]	78.3
Rated efficacy [lm/W]	78.3
Energy efficiency class (EEC)	A+
Rated life L70/B50 [h]	15000
Nominal correlated colour temperature (CCT) [K]	3000
Nominal lumens [lm]	470
Colour Rendering Index (CRI) [Ra]	80

Electrical data

Nominal lamp power factor...	>0.5
Operating Temperature (MIN) [°C]	-20°C
Operating Temperature (MAX) [°C]	+40°C
Startup time [sec]	<0.5s
Power Factor	>0.5
Number of switching cycles	50000
Dimming Capability	No
Nominal lamp voltage range [V]	220-240V
Nominal power [W]	6

Logistic data

DUN Code	10064894573870
EAN Code	0064894573873
Pack Quantity	15
Inner pack type	Box
Outer pack type	Carton
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Product range datasheet \(PDF\)](#)

[Datasheets \(HTTP\)](#)

[Images \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)