




GE  
Lighting

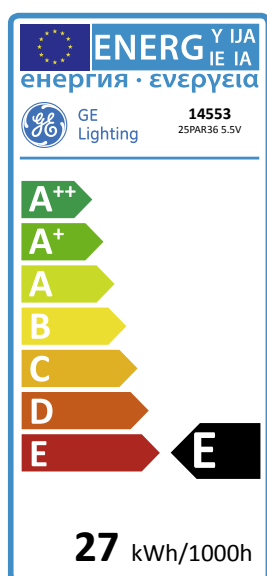

27

kWh/1000h

E

energy class

5

lumens/watt

PAR 36

25PAR36 5.5V

14553

## Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

## Application areas



Club and Disco



WORLDWIDE PARTNER

## Product data

Cap/Base	Screw terminal
Bulb Shape	PAR
Bulb Finish	Aluminized
Bulb Diameter [mm]	114.3
Maximum Overall Length [mm]	70
Net weight per piece [g]	248
Gross weight per piece [g]	250
Brand	General Electric (GE)

## Performance data

Nominal correlated colour temperature (CCT) [K]	3000
Nominal beam angle [°]	15
Nominal center beam candlepower (CBCP) [cd]	19700
Nominal lumens [lm]	130
Energy efficiency class (EEC)	E
Rated Life [h]	1000
Weighted energy consumption [kWh/1000h]	26.43

## Electrical data

Nominal power [W]	25
Nominal lamp voltage [V]	5
Coil type	C-6
Ballast Required	Yes

## Logistic data

DUN Code	43168145534
EAN Code	0
Pack Quantity	12
Layer quantity	1 UK
Layer quantity UK	1
Pallet quantity UK (PC)	1200
Outer case size	226 x 211 x 313 (mm)

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.