

DOWNLIGHT

CURVE

9 / 14 W LED




W	T°	LM	RÉFÉRENCES	DESCRIPTIONS LUMINAIRE
9W	3000K	845lm	CURVE-9WW	Downlight LED CURVE 9W Blanc 3000K + driver gradation à la phase
9W	4000K	880lm	CURVE-9	Downlight LED CURVE 9W Blanc 4000K + driver gradation à la phase
14W	3000K	1176lm	CURVE-14WW	Downlight LED CURVE 14W Blanc 3000K + driver gradation à la phase
14W	4000K	1392lm	CURVE-14	Downlight LED CURVE 14W Blanc 4000K + driver gradation à la phase

DRIVERS EN OPTION

W	RÉFÉRENCES	DESCRIPTIONS
9/14 W	LCA-17-250-700	Driver TRIDONIC DALI/PUSH DIM 17W 250-700 mA Class I

DIM PHASE	NON DIMMABLE	DALI/ PUSH DIM	1/10 V	FINITION NOIRE	FINITION BLANCHE	DIMENSIONS
✓	✗	✓	✗	✗	RAL 9003	9W : Ø Installation 75 mm 14W : Ø Installation 105 mm

9 W			14 W		
H (m)	D (m)	Em (Lx)	H (m)	D (m)	Em (Lx)
1	0,79	1328	1	0,64	2668
2	1,58	332	2	1,27	677
3	2,37	148	3	1,91	296
4	3,16	83	4	2,54	167
5	3,95	58	5	3,18	107

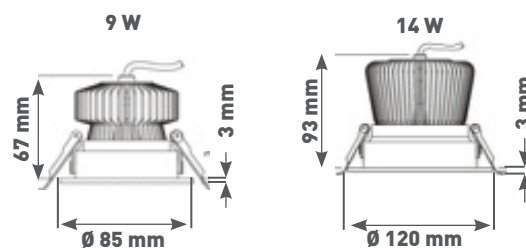

DONNÉES TECHNIQUES

CE	RoHS NORME	TENSION ENTRÉE DRIVER 220-240V	COURANT SORTIE DRIVER 500 mA	9 W 150G 14 W 250G		
IK 07	IP 44	PF 09	Ø 9 W 75 mm Ø 14 W 105 mm	38°	UGR <19	IRC 85
SDCM <3	EN 62471 RG0	ENCASTRÉ	DURÉE DE VIE 50000 H	L80B10	960°	FORGE D'ALUMINIUM
	DIM PHASE	Driver EAGLERISE	LED BRIDGELUX	BORNIER À REPIQUAGE	BLANC MAT	GARANTIE 5 ans
A+						

OPTIONS

DALI	PUSH DIM	CONNECTEUR WIELAND 3P	CONNECTEUR WIELAND 5P
------	-------------	--------------------------	--------------------------