

DOWNLIGHT

VITRO

45 W LED RECTANGULAIRE




W	T°	LM	RÉFÉRENCES	DESCRIPTIONS LUMINAIRE
45W	4000K	3600lm	LT-DWR-45	Downlight LED VITRO 45W rectangulaire orientable

DRIVERS EN OPTION

W	RÉFÉRENCES	DESCRIPTIONS
45W	LCA-45-500-1400	Driver TRIDONIC DALI/PUSH DIM 45W 500-1400 mA Class I

DIM PHASE	NON DIMMABLE	DALI/ PUSH DIM	1/10 V	FINITION NOIRE	FINITION BLANCHE	DIMENSIONS
✗	✓	✓	✗	✗	RAL 9016	Installation 220x130 mm

45 W		
H (m)	D (m)	Em (Lx)
1	2,04	1422
2	4,08	355
3	6,12	158
4	8,16	89
5	10,20	57

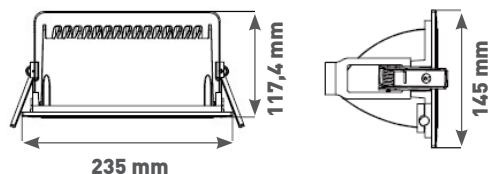

DONNÉES TECHNIQUES

CE	RoHS NORME	TENSION ENTRÉE DRIVER 220-240v	COURANT SORTIE DRIVER 1050 mA	2,1KG	→	□
☆ IK 07	💧 IP 65	PF 09	📡 Ø 220x130 mm	120°	👁️ UGR <21	📶 IRC 80
SDCM <4	EN 62471 RG0	ENCASTRÉ	📶 DURÉE DE VIE 40000 H	L80B20	850°	📶 2400000
LED EPISTAR	GARANTIE 3 ans	🌿 FONTE D'ALUMINIUM	🌿 A+			

OPTIONS

DALI	PUSH DIM	Driver TRIDONIC	CONNECTEUR WIELAND 3P	CONNECTEUR WIELAND 5P
------	----------	--------------------	--------------------------	--------------------------