


DOWNLIGHT

IKOS

9 / 32 W




W	T°	LM	RÉFÉRENCES	DESCRIPTIONS LUMINAIRE
9W	3000K	900lm	IKOS-9WW	Downlight LED IKOS Blanc 9W 3000K
9W	4000K	950lm	IKOS-9	Downlight LED IKOS Blanc 9W 4000K
9W	3000K	900lm	IKOS-9NWW	Downlight LED IKOS Noir 9W 3000K
9W	4000K	950lm	IKOS-9N	Downlight LED IKOS Noir 9W 4000K
32W	3000K	3000lm	IKOS-32WW	Downlight LED IKOS Blanc 32W 3000K
32W	4000K	3300lm	IKOS-32	Downlight LED IKOS Blanc 32W 4000K
32W	3000K	3000lm	IKOS-32NWW	Downlight LED IKOS Noir 32W 3000K
32W	4000K	3300lm	IKOS-32N	Downlight LED IKOS Noir 32W 4000K

DRIVERS EN OPTION

W	RÉFÉRENCES	DESCRIPTIONS
9W	LCA-17-250-700	Driver DALI/PUSH DIM TRIDONIC 17W 250 mA-700 mA
32W	LCA-45-400-1050	Driver DALI/PUSH DIM TRIDONIC 45W 350 mA-700 mA

DIM PHASE	NON DIMMABLE	DALI/ PUSH DIM	1/10 V	FINITION NOIRE	FINITION BLANCHE	DIMENSIONS
✗	✓	✓	✗	RAL 9017	RAL 9003	9W : Ø Installation 70 mm 32W : Ø Installation 115 mm

9 W			32 W		
H (m)	D (m)	Em (lx)	H (m)	D (m)	Em (lx)
1	0,76	1208	1	0,78	5951
2	1,52	302	2	1,55	1488
3	2,28	134	3	2,33	661
4	3,04	75	4	3,11	372
5	3,8	48	5	3,88	238
			6	4,66	165

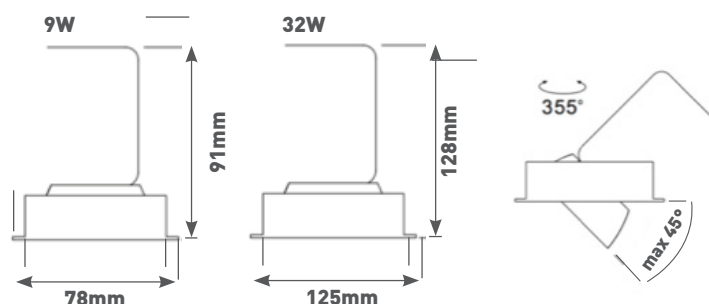

DONNÉES TECHNIQUES

CE	RoHS NORME	TENSION ENTRÉE DRIVER 220-240V	COURANT SORTIE DRIVER 9W 250 mA 32W 750 mA	9W 250G 32W 700G	360°	45°
IK 07	IP 44	PF 09	EN 62471 R60	Ø 9W 70 mm Ø 32W 115 mm	DURÉE DE VIE 50000 H	L90B10
UGR <19	IRC 95	SDCM <2	Driver LED	PHILIPS CITIZEN	BORNIER À REPIQUAGE	
ENCASTRÉ	960°	FONTE D'ALUMINIUM				
NOIR MAT	BLANC MAT	GARANTIE 5 ans	A+			

OPTIONS

DALI	PUSH DIM	CONNECTEUR WIELAND 3P	CONNECTEUR WIELAND 5P
------	----------	-----------------------	-----------------------