




RAL 9010



Vedere pagina 170 per i kit che includono il driver LED - See page 170 for kits including LED driver

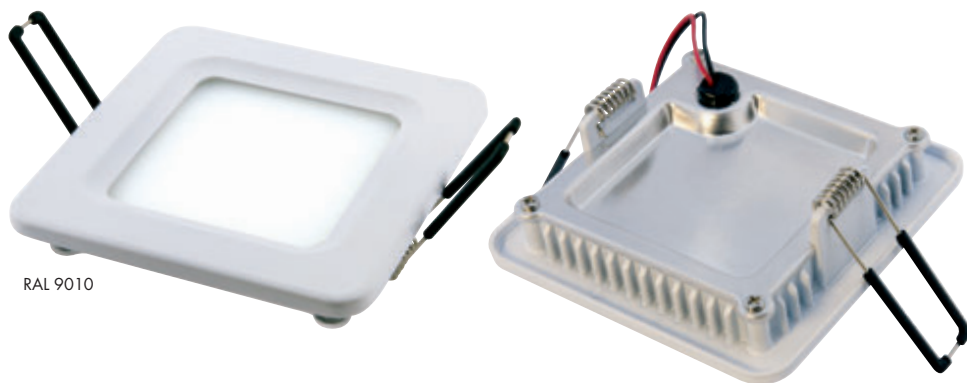

Type	Part N°	Dimensions (mm)	Colour	°Kelvin	Lumen	Power (W)	Installation hole (mm)	Packing box dimensions (mm)	Weight (kg)
SQUARE 100 NW	BD10024QNW1B	100x100x28h	Natural White	4200°K	303	6	90x90	200x190x60h	0,26
SQUARE 100 WW	BD10024QWW1B	100x100x28h	Warm White	3000°K	286	6	90x90	200x190x60h	0,26
SQUARE 150 NW	BD15024QNW1B	150x150x28h	Natural White	4200°K	727	12	125x125	250x240x60h	0,46
SQUARE 150 WW	BD15024QWW1B	150x150x28h	Warm White	3000°K	686	12	125x125	250x240x60h	0,46
SQUARE 180 NW	BD18024QNW1B	180x180x28h	Natural White	4200°K	1134	18	160x160	270x260x60h	0,59
SQUARE 180 WW	BD18024QWW1B	180x180x28h	Warm White	4200°K	1070	18	160x160	270x260x60h	0,59
SQUARE 250 NW	BD25024QNW1B	250x250x31h	Natural White	4200°K	2136	31	225x225	350x340x60h	1,05
SQUARE 250 WW	BD25024QWW1B	250x250x31h	Warm White	3000°K	2015	31	225x225	350x340x60h	1,05
SQUARE 330 NW	BD33024QNW1B	330x330x31h	Natural White	4200°K	3147	42	305x305	460x370x60h	1,70
SQUARE 330 WW	BD33024QWW1B	330x330x31h	Warm White	3000°K	2969	42	305x305	460x370x60h	1,70

Incasso a LED quadro extrapiatto

- Cornice e struttura in alluminio verniciato
- Grande omogeneità luminosa
- Funziona in bassa tensione con trasformatore 24V DC specifico (fornito a richiesta)
- Consumo limitato
- Lunga durata

Square extra flat recessed LED fixture

- Structure and frame in lacquered aluminum
- Extra flat
- Safety low voltage with specific 24V DC drivers (supplied on request)
- Limited consumption

Viereckige extraflache LED Einbaustrahler

- Rahme und Körper aus lackiertem Aluminium
- NV-betrieb durch besonderen 24VDC Transformator (auf Anfrage geliefert)
- Begrenzter Verbrauch
- Lange lebensdauer

Encastrable à LED carré extra plat

- Encadrement et corps en aluminium verni
- Luminosité très homogène
- Il marche en basse tension avec un transformateur 24V DC (livré sur demande)
- Consommation limitée
- Longue durée de vie

Focos empotrables a LED cuadrado extra plano

- Estructura y marco de aluminio pintado
- Excelente homogeneidad luminica
- Alta seguridad por funcionamiento a baja tension, con drivers específicos de 24VDC (bajo demanda)
- Bajo consumo
- Larga vida

