


**MotoPunto**

**Recessed Motorized Luminaire**

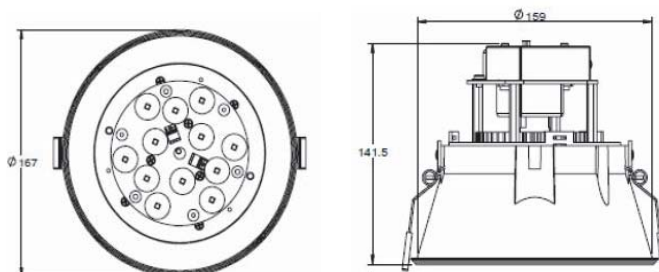

**DESCRIPTION**

Recessed dynamic white motorized downlight  
 Long life LED light source provides IR and UV free emission.  
 Color temperature can be adjust from 3000K to 5700K, intensity can be adjust from 0-100%.  
 Application areas: Retail, cabinet displays, showcases, jewelry and precious items display and showcases, residential, restaurants, galleries, museums, showrooms.

**LIGHT SOURCE AND PERFORMANCE**

LIGHT SOURCE: SMD LED  
 SDCM: 3 steps  
 CCT: Tunable from 3000K to 5700K  
 CRI: >90  
 SYSTEM POWER: 12 x 2W  
 DELIVERED LUMEN: 2800lm  
 IP: IP20

**MOUNTING**

Recessed

**Other Data**

Dimensions 167 x h 141.5 mm  
 LED Lifespan 50000 hours, L 80

**OPTICS**

**ELECTRICAL / LED DRIVER**

Input voltage: 220-240V 50/60Hz.  
 Driver: Remote, included, dimmable by CASAMBI bluetooth technology.

DIMMING OPTION	CODE	FINISH	CODE
No dimming	D0	Black	10
Laser Dim	DL		
Dali Dim	DA		
0 - 10 Dim	D1		
Phase	DP		
DMX	DX		
CASAMBI	DC		



**ORDERINGCODE**

Follow the steps to specify your fixture final code, example: **RE61-MB13-803020DL11**

PRODUCT CODE	-	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE	DIMMING OPTION	FINISH
<b>G503</b>	-		-	<b>90</b>	<b>T2</b>	<b>00</b>	<b>DB</b>	<b>10</b>

NOTES: Designed and manufactured to comply with European standard EN 60598.

We reserve the right to change specifications without prior notification.