

XL-024-D3-01

Arch SL™



Description:

The Super Slim ArchSL[™] with outstanding optical lens, delivering an even wash. It's specially designed for low building, can be used for indoor or outdoor.



Features:

- * Blend seamlessly into a buildings' facade thanks for its Slim body
- * Anodic Oxidization of aluminum housing preventing corrosion
- * Available in single color and RGB
- * Epistar SMD LED
- * Flexible control via standard protocols, DMX512, Wireless controller
- * Fittings can be installed end to end for a continuous wallwash effect
- * IP65
- * PF:0.9





Application:


- Lights for billboard, architecture, building walls, commercial building projection.
- Lights for canopy, corridor, window, archway, court, parking lot, gym, dock, park.
- Lights for bar, disco, pub, club, show and events, tree decoration, sculpture.
- Other in door lighting or other outdoor lighting.



Specifications:


Model Number	Color	LED Type	LED Quantity	Beam Angle (degrees)	Light Output (lumen)	Max.Current (Amps)	Power (W)	Voltage (VAC)	weight (g)	Length (m)
XL-024-D3-RGB-02	RGB	LED 5730SMD	48	45°	350	1	24	DC 24V	750	0.5
XL-024-D3-W-02	White		48	45°	1210	1	24			
XL-024-D3-NW-02	Natural White		48	45°	1200	1	24			
XL-024-D3-WW-02	Warm White	LED 2835SMD	48	45°	950	1	24			
XL-024-AW-W-02	White		48	45°	1210	1	24	AC 100-240V - 50-60Hz	1120	0.5
XL-024-AW-NW-02	Natural White		48	45°	1200	1	24			
XL-024-AW-WW-02	Warm White		48	45°	950	1	24			
XL-048-D3-RGB-02	RGB	LED 5730SMD	96	45°	700	1	48			
XL-048-D3-W-02	White	LED 2835SMD	96	45°	2420	1	48	DC 24V	1400	1
XL-048-D3-NW-02	Natural White		96	45°	2400	1	48			
XL-048-D3-WW-02	Warm White		96	45°	1900	1	48			
XL-048-AW-W-02	White		96	45°	2420	1	48	AC 100-240V - 50-60Hz	1770	1
XL-048-AW-NW-02	Natural White		96	45°	2400	1	48			
XL-048-AW-WW-02	Warm White		96	45°	1900	1	48			

Product size(Unit:mm/inch):

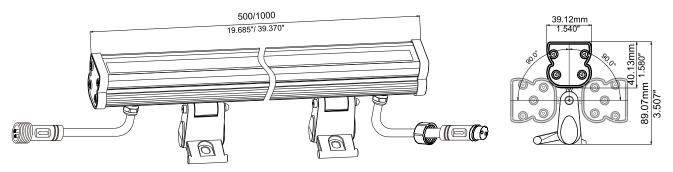


Wiring diagram:

1.24V SMD single color Wall Washer.

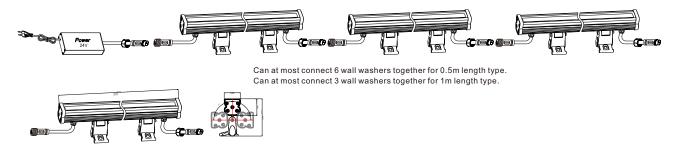




2.110-240V SMD single color Wall Washer.

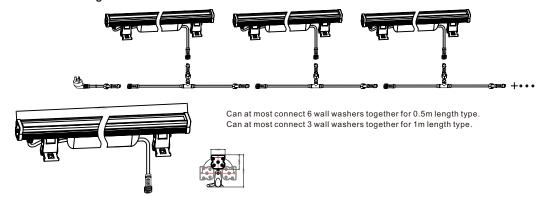

3.24V SMD RGB Wall Washer.

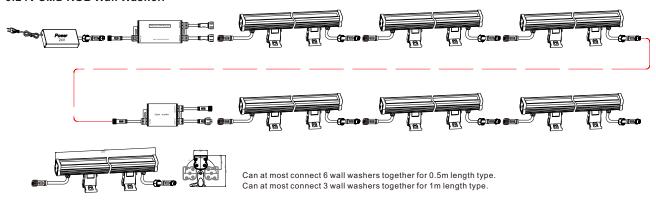

Package Information:

0.5M:

Inner box dimesion:567*113*110mm

Product gross weight: 0.75kg

Carton box dimension(9PCS):588*353*356mm

Carton box Weight: 7.6 Kg

1M:

Inner box dimesion:1067*113*110mm

Product gross weight: 1.4Kg

Carton box dimension(9PCS):1088*353*356mm

Carton box Weight: 14.1Kg

Other cautions:

- 1. Please read the specification first, to make sure the service environment matches the conditions in the specification before using.
- 2. Please confirm the applicable power supply before using.
- 3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
- 4. Operation against rules may damage your property even harm to your personal safety.
- 5. Preliminarily estimate required quantity of Wall Washers, then according to the power rating of single Wall Washer to figure out the total power and design power supply plan.
- 6. Dangerous high voltage, Non-professionals are not allowed to maintain the products.
- 7. If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other relevant qualified personnels to avoid dangers.