


XL-024-D3-01

Arch SL™

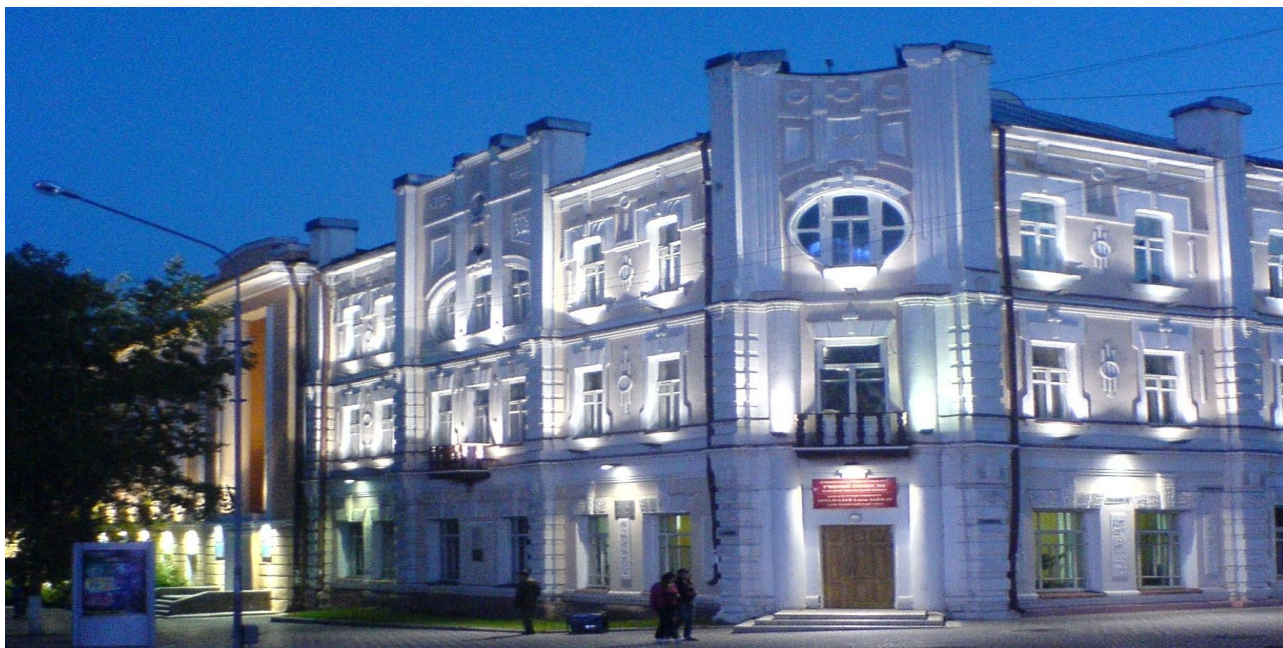

Description:

The Super Slim ArchSL™ with outstanding optical lens, delivering an even wash. It's specially designed for low building, can be used for indoor or outdoor.

Features:

- * Blend seamlessly into a buildings' facade thanks for its Slim body
- * Anodic Oxidization of aluminum housing preventing corrosion
- * Available in single color and RGB
- * Epistar SMD LED
- * Flexible control via standard protocols, DMX512, Wireless controller
- * Fittings can be installed end to end for a continuous wallwash effect
- * IP65
- * PF:0.9




Application:

- Lights for billboard, architecture, building walls, commercial building projection.
- Lights for canopy, corridor, window, archway, court, parking lot, gym, dock, park.
- Lights for bar, disco, pub, club, show and events, tree decoration, sculpture.
- Other in door lighting or other outdoor lighting.

Specifications:


Model Number	Color	LED Type	LED Quantity	Beam Angle (degrees)	Light Output (lumen)	Max.Current (Amps)	Power (W)	Voltage (VAC)	weight (g)	Length (m)
XL-024-D3-RGB-02	RGB	LED 5730SMD	48	45°	350	1	24	DC 24V	750	0.5
XL-024-D3-W-02	White	LED 2835SMD	48	45°	1210	1	24			
XL-024-D3-NW-02	Natural White		48	45°	1200	1	24			
XL-024-D3-WW-02	Warm White		48	45°	950	1	24			
XL-024-AW-W-02	White		48	45°	1210	1	24	AC 100-240V 50-60Hz	1120	0.5
XL-024-AW-NW-02	Natural White		48	45°	1200	1	24			
XL-024-AW-WW-02	Warm White		48	45°	950	1	24			
XL-048-D3-RGB-02	RGB	LED 5730SMD	96	45°	700	1	48	DC 24V	1400	1
XL-048-D3-W-02	White	LED 2835SMD	96	45°	2420	1	48			
XL-048-D3-NW-02	Natural White		96	45°	2400	1	48			
XL-048-D3-WW-02	Warm White		96	45°	1900	1	48			
XL-048-AW-W-02	White		96	45°	2420	1	48	AC 100-240V 50-60Hz	1770	1
XL-048-AW-NW-02	Natural White		96	45°	2400	1	48			
XL-048-AW-WW-02	Warm White		96	45°	1900	1	48			

Product size(Unit:mm/inch):

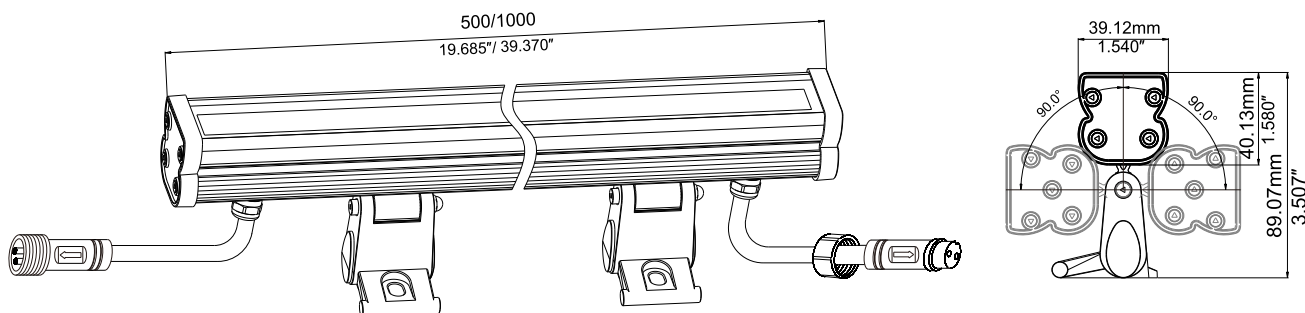


Wiring diagram:


1.24V SMD single color Wall Washer.

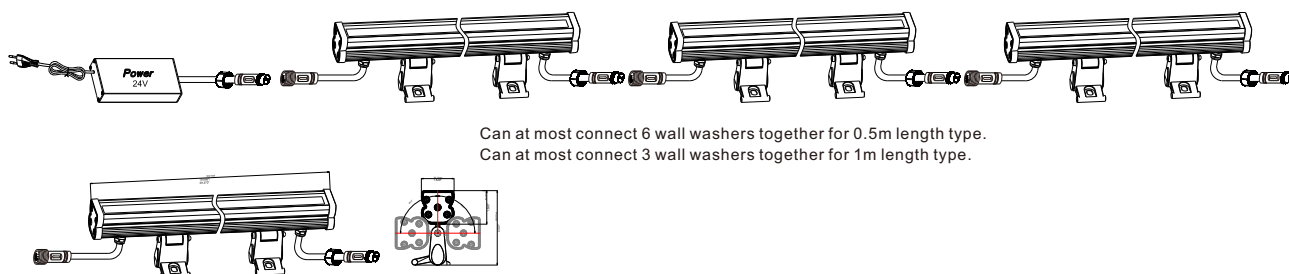

2.110-240V SMD single color Wall Washer.

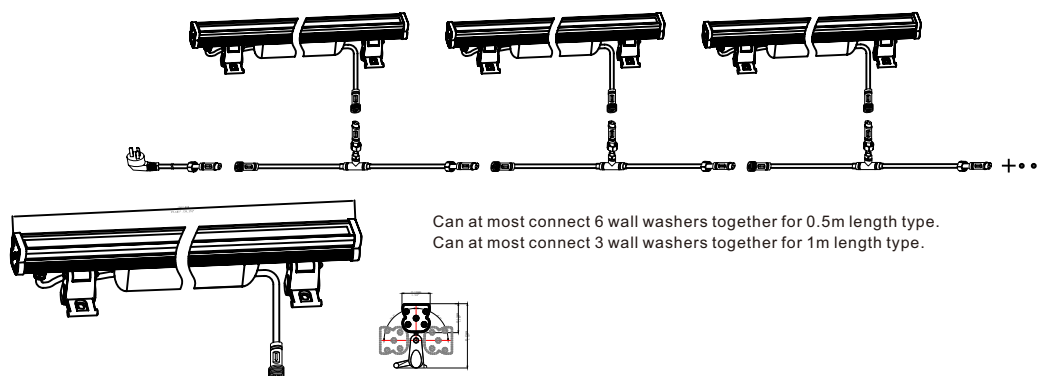

3.24V SMD RGB Wall Washer.

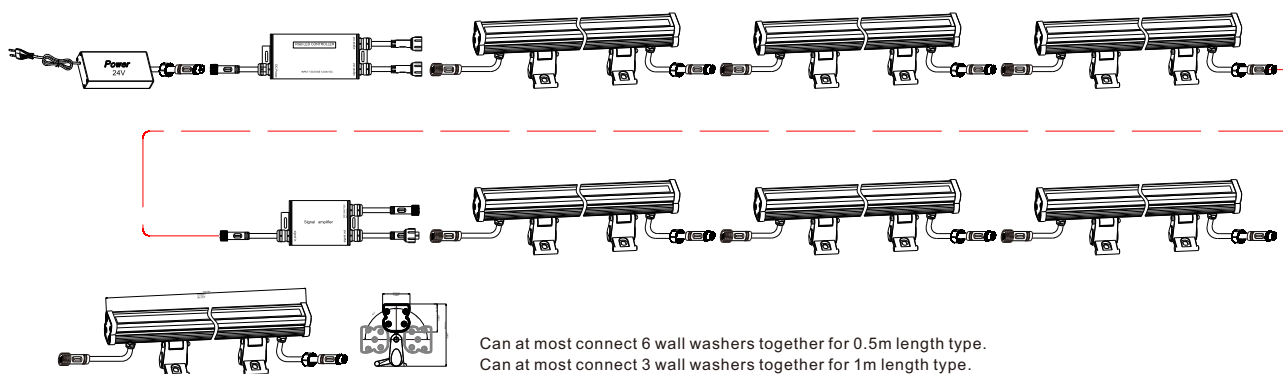

Package Information:

0.5M:

Inner box dimension:567*113*110mm

Product gross weight:0.75kg

Carton box dimension(9PCS):588*353*356mm

Carton box Weight:7.6Kg

1M:

Inner box dimension:1067*113*110mm

Product gross weight:1.4Kg

Carton box dimension(9PCS):1088*353*356mm

Carton box Weight:14.1Kg

Other cautions:

1. Please read the specification first, to make sure the service environment matches the conditions in the specification before using.
2. Please confirm the applicable power supply before using.
3. Make sure the switch of product is off before connect to the power supply to prevent electric shock.
4. Operation against rules may damage your property even harm to your personal safety.
5. Preliminarily estimate required quantity of Wall Washers, then according to the power rating of single Wall Washer to figure out the total power and design power supply plan.
6. Dangerous high voltage, Non-professionals are not allowed to maintain the products.
7. If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other relevant qualified personnels to avoid dangers.