

## Sylproof LED

SYLPROOF LED 12W 662MM S 4000K

0047880



## Range Features

- IP65 LED Waterproof Batten with high output and high efficacy. 12W LED is equivalent to an 18W Fluorescent.



## PRODUCT OVERVIEW

Certifications	CE
Colour temperature (K)	4000
Colour	Grey
CRI (Ra)	80
Dimmable	Non-dim / not dimmable (switched only)
EAN code	5410288478807
Luminous flux (lm)	1070
Housing	Polycarbonate
IK rating	8
IP rating	65
Light colour	Neutral White
LOR (%)	100
Mount	Surface
Ordering number	0047880
Efficacy (Rated) (lm/w)	88
Average life (Rated) (h)	50000
Technology	LED
Voltage (V)	220-240
Included lamp	Integrated LED
Compatible with bulbs of energy class:	A++

## DATA TABLE

## General data

Average life (Nominal) (h)	50000
Certifications	CE
Control gear type	Electronic
Dimmable	Non-dim / not dimmable (switched only)
EAN code	5410288478807
Environment	Internal

# Sylproof LED

SYLPROOF LED 12W 662MM S 4000K

0047880

<b>General application</b>	Logistics and Industry
<b>Housing</b>	Polycarbonate
<b>Mount</b>	Surface
<b>Ordering number</b>	0047880
<b>Range features</b>	IP65 LED Waterproof Batten with high output and high efficacy. 12W LED is equivalent to an 18W Fluorescent.
<b>Product name</b>	SYLPROOF LED 12W 662MM S 4000K
<b>Average life (Rated) (h)</b>	50000
<b>Technology</b>	LED
<b>Compatible with bulbs of energy class:</b>	A++
<b>Tender text</b>	Weather and Vandal resistant 12W LED luminaire 1070lm output with heat resistant robust polycarbonate body (IK08). UV stabilised polycarbonate diffuser with linear prisms designed to optimise light output and to reduce glare. Stainless steel diffuser clips and fixing brackets for surface mounting. Retained diffuser for easy maintenance.

## Optical data

<b>Colour temperature (K)</b>	4000
<b>CRI (Ra)</b>	80
<b>Distribution type</b>	Direct
<b>Luminous flux (lm)</b>	1070
<b>Light colour</b>	Neutral White
<b>LOR (%)</b>	100

## Physical data

<b>Colour</b>	Grey
<b>Diffuser finish</b>	Clear
<b>Diffuser material</b>	Polycarbonate
<b>Height (mm)</b>	91
<b>IK rating</b>	8
<b>IP rating</b>	65
<b>Lamp included</b>	Yes
<b>Length (mm)</b>	662
<b>Reflector finish</b>	Polycarbonate Diffuser
<b>Weight (kg)</b>	1.19
<b>Width (mm)</b>	83
<b>Included lamp</b>	Integrated LED

## Electrical data

<b>Drive current (mA)</b>	150
<b>Electrical protection</b>	CLASS I
<b>Glow wire test</b>	850
<b>Efficacy (Rated) (lm/w)</b>	88



## Sylproof LED

SYLPROOF LED 12W 662MM S 4000K

0047880

<b>Ta rating</b>	-30°C to +30°C
<b>Total power consumption (W)</b>	12.2
<b>Voltage (V)</b>	220-240

### PHOTOMETRY

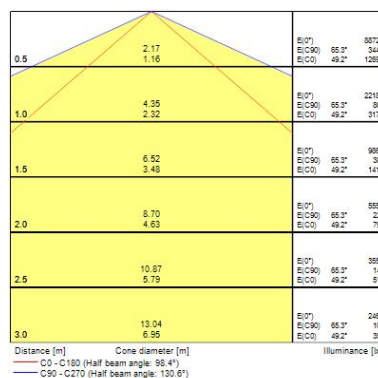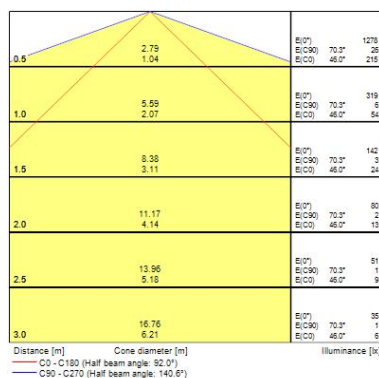


## Sylproof LED

SYLPROOF LED 12W 662MM S 4000K

**0047880**

**SYLVANIA**
0047880



This luminaire is compatible with bulbs of the energy classes:

A<sup>++</sup>

A<sup>+</sup>

A

B


C


D

E

}  
**L  
E  
D**

This luminaire is sold with a bulb of the energy class:

874/2012
 



This luminaire is compatible with bulbs of the energy classes:

A<sup>++</sup>

A<sup>+</sup>

A

B

C

D

E

}  
**L  
E  
D**

This luminaire is sold with a bulb of the energy class:

**SYLVANIA**
0047880
 874/2012
 