

# Sylproof LED

SYLPROOF LED 75W 1565MM T 4000K

0047885



## Range Features

- IP65 LED Waterproof Batten with high output and high efficacy. 75W LED is equivalent to 2x58W Fluorescent.



## PRODUCT OVERVIEW

Certifications	CE
Colour temperature (K)	4000
Colour	Grey
CRI (Ra)	80
Dimmable	Non-dim / not dimmable (switched only)
EAN code	5410288478852
Luminous flux (lm)	7270
Housing	Polycarbonate
IK rating	8
IP rating	65
Light colour	Neutral White
LOR (%)	100
Mount	Surface
Ordering number	0047885
Efficacy (Rated) (lm/w)	97
Average life (Rated) (h)	50000
Technology	LED
Voltage (V)	220-240
Included lamp	Intergrated LED
Compatible with bulbs of energy class:	A++

## DATA TABLE

### General data

Average life (Nominal) (h)	50000
Certifications	CE
Control gear type	Electronic
Dimmable	Non-dim / not dimmable (switched only)
EAN code	5410288478852
Environment	Internal

# Sylproof LED

SYLPROOF LED 75W 1565MM T 4000K

0047885

General application	Logistics and Industry
Housing	Polycarbonate
Mount	Surface
Ordering number	0047885
Range features	IP65 LED Waterproof Batten with high output and high efficacy. 75W LED is equivalent to 2x58W Fluorescent.
Product name	SYLPROOF LED 75W 1565MM T 4000K
Average life (Rated) (h)	50000
Technology	LED
Compatible with bulbs of energy class:	A++
Tender text	Weather and Vandal resistant 75W LED luminaire 7270lm output with heat resistant robust polycarbonate body (IK08). UV stabilised polycarbonate diffuser with linear prisms designed to optimise light output and to reduce glare. Stainless steel diffuser clips and fixing brackets for surface mounting. Retained diffuser for easy maintenance. As Sylvania Sylproof Superia LED

## Optical data

Colour temperature (K)	4000
CRI (Ra)	80
Distribution type	Direct
Luminous flux (lm)	7270
Light colour	Neutral White
LOR (%)	100

## Physical data

Colour	Grey
Diffuser finish	Clear
Diffuser material	Polycarbonate
Height (mm)	91
IK rating	8
IP rating	65
Lamp included	Yes
Length (mm)	1565
Reflector finish	Polycarbonate Diffuser
Weight (kg)	3.1
Width (mm)	123
Included lamp	Intergrated LED

## Electrical data

Drive current (mA)	1100
Electrical protection	CLASS I
Glow wire test	850
Efficacy (Rated) (lm/w)	97

## Sylproof LED

SYLPROOF LED 75W 1565MM T 4000K

0047885


<b>Ta rating</b>	-30°C to +30°C
<b>Total power consumption (W)</b>	75
<b>Voltage (V)</b>	220-240

### PHOTOMETRY

0.5	2.17 1.16	E(0°) E(C90) E(C0)	3072 344 1259
1.0	4.35 2.32	E(0°) E(C90) E(C0)	2215 36 917
1.5	6.52 3.48	E(0°) E(C90) E(C0)	908 38 141
2.0	8.70 4.63	E(0°) E(C90) E(C0)	655 32 79
2.5	10.87 5.79	E(0°) E(C90) E(C0)	355 14 51
3.0	13.04 6.95	E(0°) E(C90) E(C0)	248 10 35

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 90.4°)  
— C90 - C270 (Half beam angle: 120.6°)

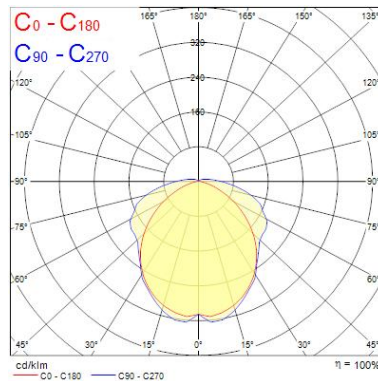

0047885

**LED**

This luminaire is compatible with bulbs of the energy classes:

874/2012

This luminaire is compatible with bulbs of the energy classes:

**LED**

This luminaire is sold with a bulb of the energy class:

**SYLVANIA** 0047885

874/2012