

T5 Batten ECO


LBTE 4.5 NW 1ft ECO

93044235



Product information

The LED T5 Batten designed to be a direct replacement for conventional battens, with energy savings. It offers multiple installation methods to ease your worries and bring the customer a brand new experience of soft lighting. Switch free luminaires. The best choice for smooth linear lighting. We offer this range of 8 luminaires in 4 wattages.

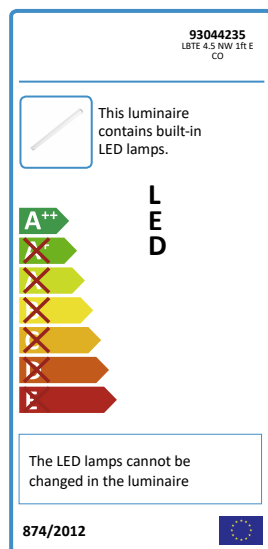

Product data

| | |
|-------------------------------|---|
| Mounting type | Surface mount |
| Brand | GE Lighting |
| IP Rating | 20 |
| Certifications | CE/EAC |
| Body colour | White |
| Weight [kg] | 0.07 |
| DIALux description | GE - T5 Batten ECO - 400lm - 4.5W - 4000K - 80CRI - 93044235[SKU] - Surface mount |
| IEC protection classes | Class II |
| Impact resistance (IK) | IK02 |
| Dimensions | 311.5x25.9x37.3mm |
| Energy efficiency class (EEC) | A++ |

Performance data

| | |
|---|----------------|
| Rated life L70/B50 [h] | 30000 |
| Operating Voltage | 220-240V |
| Ambient Temperature [°C] | -20°C to +40°C |
| Rated efficacy [lm/W] | 89 |
| Total system power | 4.5 |
| Nominal lumens [lm] | 400 |
| Rated lumens [lm] | 400 |
| Rated power [W] | 4.5 |
| Nominal correlated colour temperature (CCT) [K] | 4000 |
| Colour rendering index (CRI) [Ra] | 80+ |

Optical data

| | |
|------------------------|------|
| Nominal beam angle [°] | 170° |
|------------------------|------|


Electrical data

| | |
|---------------------------|----------------------------------|
| Nominal lamp power factor | 0.8 |
| Controllability | Not dimmable electronic (Static) |

Logistic data

| | |
|----------------|-----------|
| Product status | Available |
| Shipment | Standard |

Photometric Data

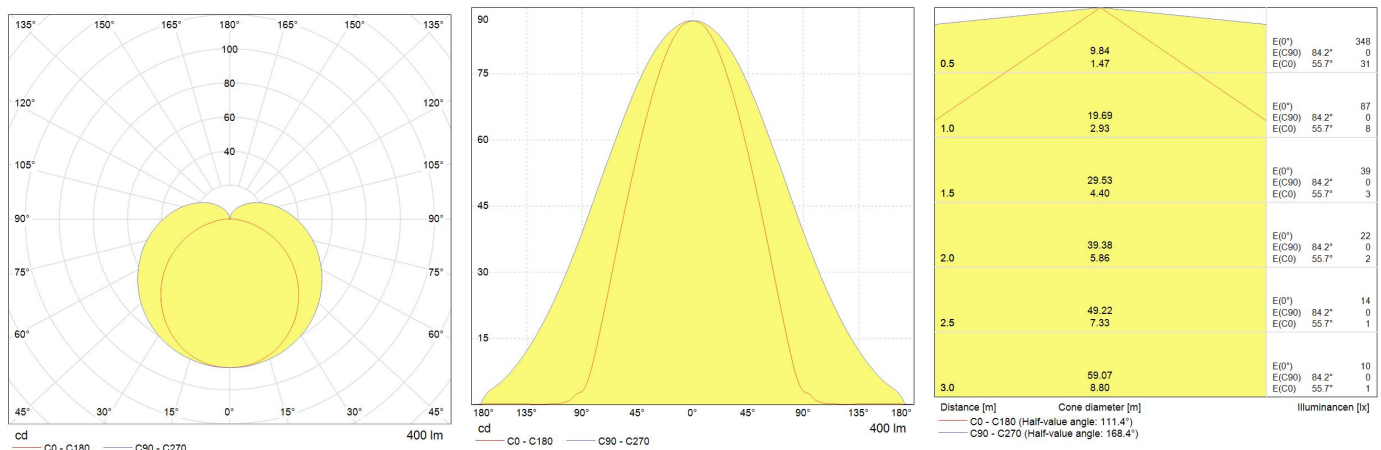

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Datasheet \(PDF\)](#)

[Datasheet - GE \(PDF\)](#)

[Installation guide \(PDF\)](#)

[Images \(HTTP\)](#)