# **JIUNGSRAM**<sup>™</sup>

Innovation is our heritage EST. 1896





### T5 Batten Switch G2 LED Batten G2 TU IP20 16W 4ft 840 S 93120938

## **Product information**

The LED Batten G2 designed to be a direct replacement for conventional battens, now with even higher efficiency. It offers multiple installation methods to ease your worries and bring the customer a brand new experience of soft lighting. The luminaire is fitted with an on/off switch for individual operation. The best choice for smooth linear lighting. We offer this range of 6 luminaires in 3 wattages.

#### Product data

Product code	93120938
Description	LED Batten G2 TU IP20 16W 4ft 840 S
DIALux description	TUNGSRAM - T5 Batten Switch G2 - 1920lm - 16W - 4000K - 80CRI - 93120938[SKU] - Surface
Direct Shipment pair	93120920 - LED Batten G2 TU IP20 16W 4ft 840 S DS
Brand	TUNGSRAM
Product category	Battens
Product family	T5 Switch Batten G2
Application areas	Office; Retail; Hospitality; Indoor and cove
DUN Code	15994100094248
Light source	LED
Sensor	No sensor
Emergency option	No EM
Mounting type	Surface
Weight [kg]	0,2
Body color	White
Product dimensions (Length) x (Width) x (Height) [mm]	1184 x 24 x 35
Operating temperature min [°C]	-20
Operating temperature max [°C]	40
Rated ambient temperature (tq) [°C]	25
Cooling	Passive
Certifications	CE, UKCA
General warranty [year]	5

#### Performance data

System power [W]	16
Nominal luminous flux [lm]	1920
Rated efficacy [lm/W]	120
Rated life L70/B50 [h]	50000
IP front (optical)	20
IP back (electrical)	20
IP Rating	20
Impact resistance (IK)	IK03

#### Photometrical data

Photometric distribution	Wide
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	>80
Nominal beam angle [°]	150
Colour consistency in MacAdam steps SDCM	max 6
Photobioligical risk	RGO


#### **Electrical data**

IEC protection class	Class II
Operating voltage [V]	220-240V
Rated frequency or frequency range [Hz]	50/60Hz
Lamp input current [mA]	73
Nominal lamp power factor	>=0.7
Controllability	Static

#### Logistic data

Box quantity	1
Shipment	Standard
Product status	Available

#### Light distribution

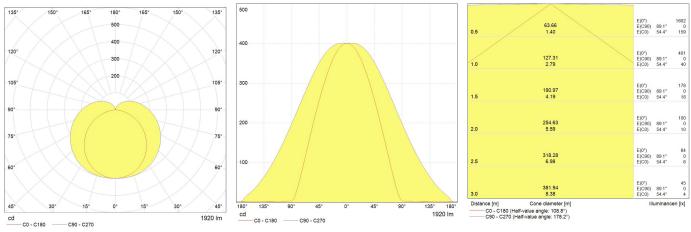

#### Downloads & Links

Go to the catalog site (HTTP) Datasheet (PDF) Installation guide (PDF) Images (HTTP) Declaration of Conformity (HTTP) Datasheets on all languages (HTTP)



Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.