

PROJECTEURS SUR RAIL

SOPHIA


2x15W / 3x15W IRC90



W	T°	LM	RÉFÉRENCES	DESCRIPTIONS
2x15W	3000K	2200lm	SOPHIA-2x15WW	Luminaire SOPHIA blanc 2x15 3000k IRC90
2x15W	4000K	2400lm	SOPHIA-2x15	Luminaire SOPHIA blanc 2x15 4000k IRC90
3x15W	3000K	3400lm	SOPHIA-3x15WW	Luminaire SOPHIA blanc 3x15 3000k IRC90
3x15W	3000K	3600lm	SOPHIA-3x15	Luminaire SOPHIA blanc 3x15 4000k IRC90

DIM PHASE	NON DIMMABLE	DALI/ PUSH DIM	1/10 V	FINITION NOIRE	FINITION BLANCHE	DIMENSIONS
×	✓	×	×	×	RAL 9003	

2x15 W			3x15 W		
H (m)	D (m)	Em (Lx)	H (m)	D (m)	Em (Lx)
1	1,1	661	1	1.0	824
2	2,1	202	2	2,1	251
3	3,2	106	3	3,1	132
4	4,2	69	4	4,2	86

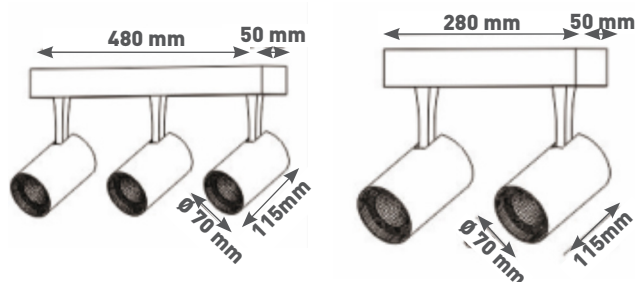

DONNÉES TECHNIQUES

CE	RoHS NORME	TENSION ENTRÉE DRIVER 220-240V	2x15 1KG 3x15 1.5KG			IK 7
IP 20	PF 09	360°	60°	IRC 90	SDCM < 3	EN 62471 GR0
DURÉE DE VIE 50000 H	GARANTIE 5 ans	L80B20	960°	DRIVER INTERNE		Driver LIFUD
LED CREE LEDs	BLANC MAT	SURFACE	SURFACE	FRONT D'ALUMINIUM	A+	

OPTIONS

Aucune option.