

Sylflood


SYLFLOOD 1 Extensive + bulb HSI-TD 150W 4K

0039911



Caractéristiques de la gamme de produits

- High photometric performance
- Range suitable for the majority of outdoor applications
- Device comes complete, including ballast and bulb
- Protection class IP65
- Direct access to the bulb and the ballast



PRÉSENTATION PRODUIT

Numéro de commande	0039911
Technologie	HID
Code EAN	5410288399119
Certifications	CE, F-mark
Montage	Ground surface, U-bracket, Wall surface
Corps	Die-cast aluminium
LOR (%)	77
Angle de faisceau (°)	60°
Température de couleur (K)	4200
Tension (V)	230
Lampes	SA HSI-TD150W/NDL UVS RX7S SL
Couleur	Metallized grey
Lampe incluse	0021034
Indice de protection IP	65
Indice de protection IK	8

Sylflood

SYLFLOOD 1 Extensive + bulb HSI-TD 150W 4K

0039911

TABLEAU DES DONNÉES

Données générales

Numéro de commande	0039911
Technologie	HID
Code EAN	5410288399119
Certifications	CE, F-mark
Montage	Ground surface, U-bracket, Wall surface
Longue description	High photometric performance. Range suitable for the majority of outdoor applications. Device comes complete, including ballast and bulb. Protection class IP65. Direct access to the bulb and the ballast
Nom du produit	SYLFLOOD 1 Extensive + bulb HSI-TD 150W 4K
Disponibilité de l'appareillage	Included
Montage de l'appareillage	Integral
Type d'appareillage	Low Loss Magnetic
Environnement	Exterior
Corps	Die-cast aluminium
Quantité par emballage	1

Données optiques

LOR (%)	77
Angle de faisceau (°)	60°
Température de couleur (K)	4200
Type de distribution	Symmetric

Données électriques

Consommation électrique totale (W)	150
Tension (V)	230
Indice de protection Ta	25°C
Protection électrique	Class I
Test du fil incandescent	850°C
Lampes	SA HSI-TD150W/NDL UVS RX7S SL
Nombre de têtes	1
Nombre de lampes total	1

Sylflood

SYLFLOOD 1 Extensive + bulb HSI-TD 150W 4K

0039911

Données physiques



Surface exposée (m2)	0.0795m²
Poids (kg)	5.50
Couleur	Metallized grey
Lampe incluse	Yes
Lampe incluse	0021034
Hauteur (mm)	152
Largeur (mm)	233
Longueur (mm)	338
Indice de protection IP	65
Indice de protection IK	8
Finition du diffuseur	Clear
Matériau du diffuseur	Glass
Matériau réflecteur	Aluminium
Single package dimensions (L x W x H) (cm)	40.00 x 20.00 x 28.00
Outer package dimensions (L x W x H) (cm)	40.00 x 20.00 x 28.00

Sylflood


SYLFLOOD 1 Extensive + bulb HSI-TD 150W 4K

0039911

PHOTOMÉTRIE

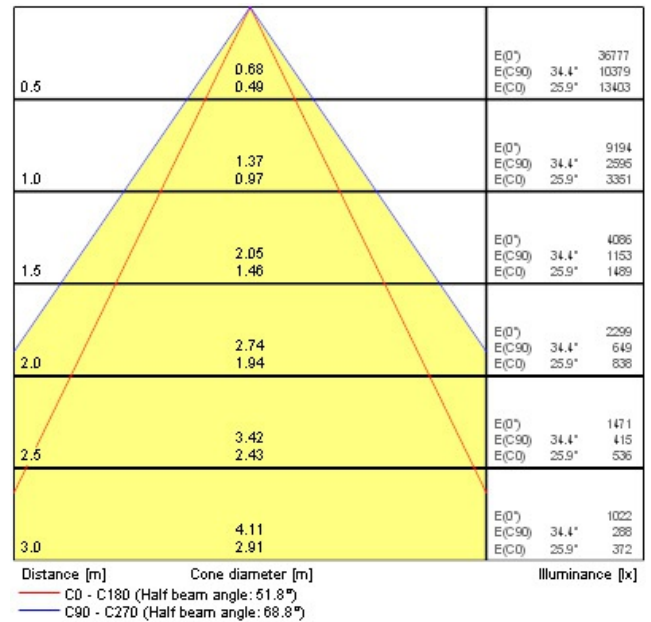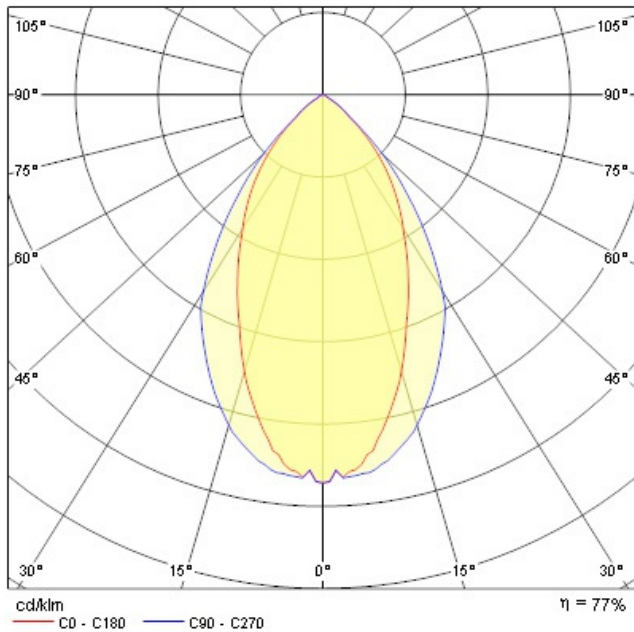

DESSINS TECHNIQUE

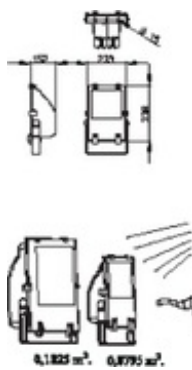

ÉTIQUETAGE ÉNERGÉTIQUE

Sylflood

SYLFLOOD 1 Extensive + bulb HSI-TD 150W 4K

0039911

