
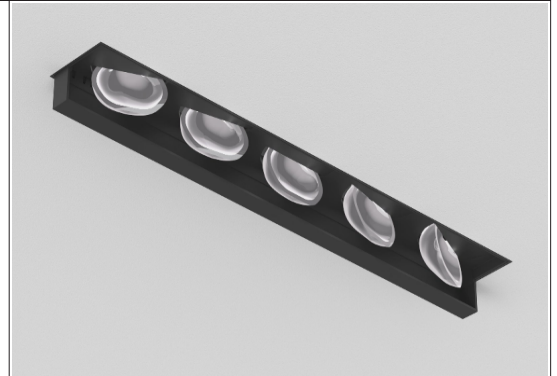


MAGIQ WALLWASH



ARTICLE NUMBER 120-0420

500 mA

IP20



MOUNTING

Mounting location: Ceiling
Type: Recessed (Trimless)

ELECTRICAL

Control gear needed: Yes
Control gear included: No
Dimming: Depending on driver

DIMENSION

Length/Width: 267mm /36mm
Height: 64 mm
Cutout Length/Width: 273 mm/42 mm
Min. recessed depth: 100 mm

WEIGHT

Net: 1.217 kg

LIGHT

Adjustability: fixed
Light calculation: Wallwasher
Frame Color: ☒ Black frame

LAMP DESCRIPTION

Lamp type: LED
Total power: 31 W
Power loss ballast: 2.8W
Luminous flux of the light source: 2705 lm
Luminous flux of the luminaire: 2443 lm
Colour rendering index (CRI): 90
MacAdam: 5
LED colour direct: 4000K


ORDER NUMBER

120-0420 40 02

TECHNICAL DESCRIPTION

The rimless spot MAGIQ WALLWASH from the family MAGIQ consists of aluminum-die-cast. The Wallwasher corresponds IP20 at protection class 3. Dimming (# 120-0420) depends on the used ballast and may vary. WALLWASH VERTICAL BOOST provides optimised light distribution with loss of intensity at the borders. ZERO LIGHT LEAKAGE technology guarantees trouble-free use in acoustic ceilings.

Polar Curve

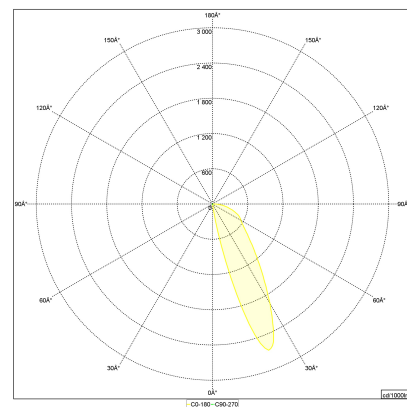

Measurement based on the color white



Date: 2/1/2024

We reserve the right to make technical changes without prior notice.

PROLICHT GmbH | Austria | 6091 Götzens | Gewerbepark 9

T +43 5234 33 499 | F +435234 33 499-22 | info@prolicht.at

www.prolicht.at