
# **JUNGSRAM**<sup>®</sup>

Innovation is our heritage EST. 1896






# Integrated Bulkhead LED Bulkhead G1 TU D25 9W 840 S NNM 93107552

# **Product information**

A simple and elegant light fitting, designed with Integrated LED Light Module and dedicated optic, both for interior and exterior applications. The Integrated Bulkhead range offers a comprehensive choice of versions including two sizes, opal diffuser and optional sensor function. It is a wall and ceiling LED luminaire that can be utilised in versatile application ranges including damp environments, entrance halls, receptions, stairwells, corridors, circulation routes, rest areas and outside walls of buildings.

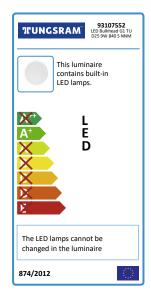

# Product data

Product code	93107552
Description	LED Bulkhead G1 TU D25 9W 840 S NNM
DIALux description	TUNGSRAM - Integrated Bulkhead - 855lm - 9W - 4000K - 80CRI - 93107552[SKU] - Surface
Brand	TUNGSRAM
Product category	Integrated Bulkhead
Product family	Bulkheads
Application areas	Stairways / Corridors
DUN Code	10064894579056
Light source	LED
Sensor	Yes
Emergency option	No EM
Mounting type	Surface
Weight [kg]	0,74
Body color	White
Product dimensions (Length) x (Width) x (Height) [mm]	Dia 250 x Dia 250 x 102
Operating temperature min [°C]	-30
Operating temperature max [°C]	40
Rated ambient temperature (tq) [°C]	25
Cooling	Passive
Certifications	CE
General warranty [year]	5

### Performance data

System power [W]	9
Nominal luminous flux [lm]	855
Rated efficacy [lm/W]	95
Rated life L70/B50 [h]	60000
IP front (optical)	65
IP back (electrical)	65
IP Rating	65
Impact resistance (IK)	IK10
Energy efficiency class (EEC)	A+

#### Photometrical data

Photometric distribution	Wide
Nominal correlated colour temperature (CCT) [K]	4000
Colour rendering index (CRI) [Ra]	>=80
Nominal beam angle [°]	125 ± 12
UGR value (4H8H)	25,3
Colour consistency in MacAdam steps SDCM	≤6


#### **Electrical data**

IEC protection class	Class II
Operating voltage [V]	220-240V
Rated frequency or frequency range [Hz]	50/60Hz
Lamp input current [mA]	55
Nominal lamp power factor	>=0.7
Controllability	Static

# Logistic data

Box quantity	1
Shipment	Standard
Product status	Available

# Light distribution

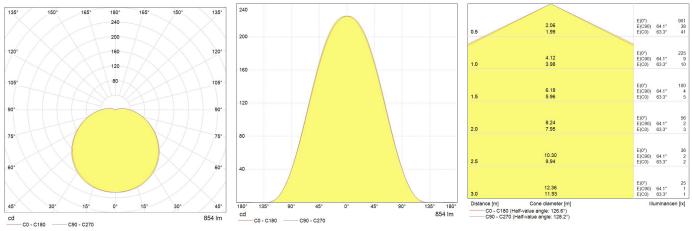

# Downloads & Links

Go to the catalog site (HTTP) Datasheet (PDF) Installation guide (PDF) Images (HTTP) Photometry files for EMERGENCY versions (HTTP) DoC document (PDF) Datasheet (FR) (PDF)



Tungsram is a registered trademark of Tungsram Operations Kft.

tungsram.com

We in Tungsram Operations Kft. are constantly developing and improving our products. For this reason, all product descriptions in this catalogue are intended as a general guide, and we may change specifications from time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, Tungsram cannot accept any liability arising from the reliance on such data to the extent permitted by law.