


## Integrated Bulkhead

BHTD30-25307S-NNM

93073546

### Product information

A simple and elegant light fitting, designed with Integrated LED Light Module and dedicated optic, both for interior and exterior applications. The Integrated Bulkhead range offers a comprehensive choice of versions including two sizes, opal diffuser and optional sensor function. It is a wall and ceiling LED luminaire that can be utilised in versatile application ranges including damp environments, entrance halls, receptions, stairwells, corridors, circulation routes, rest areas and outside walls of buildings.

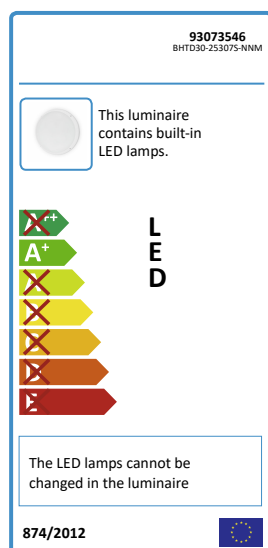

## Product data

|                               |  |
|-------------------------------|--|
| Mounting type                 | Wall mounted   |
| Brand                         | GE Lighting  |
| IP Rating                     | 65   |
| Certifications                | CE/EAC   |
| Body colour                   | white  |
| Weight [kg]                   | 1.05   |
| DIALux description            | GE - Integrated Bulkhead - 2400lm - 25W - 3000K - 80CRI - 93073546[SKU] - Wall mounted |
| IEC protection classes        | Class II   |
| Impact resistance (IK)        | IK10   |
| Dimensions                    | ø300x109mm   |
| Energy efficiency class (EEC) | A+   |

## Performance data

|   |                |
|---|----------------|
| Rated life L70/B50 [h]                          | 45000          |
| Operating Voltage                               | 220-240V       |
| Ambient Temperature [°C]                        | -30°C to +40°C |
| Rated efficacy [lm/W]                           | 96             |
| Total system power                              | 25             |
| Nominal lumens [lm]                             | 2400           |
| Rated lumens [lm]                               | 2400           |
| Rated power [W]                                 | 25             |
| Nominal correlated colour temperature (CCT) [K] | 3000           |
| Colour rendering index (CRI) [Ra]               | 80+            |

## Optical data

|                        |          |
|------------------------|----------|
| Nominal beam angle [°] | 125°±12° |
|------------------------|----------|


## Electrical data

|                           |        |
|---------------------------|--------|
| Nominal lamp power factor | 0.9    |
| Controllability           | Sensor |

## Logistic data

|                |           |
|----------------|-----------|
| Product status | Available |
| Shipment       | Standard  |

## Photometric Data

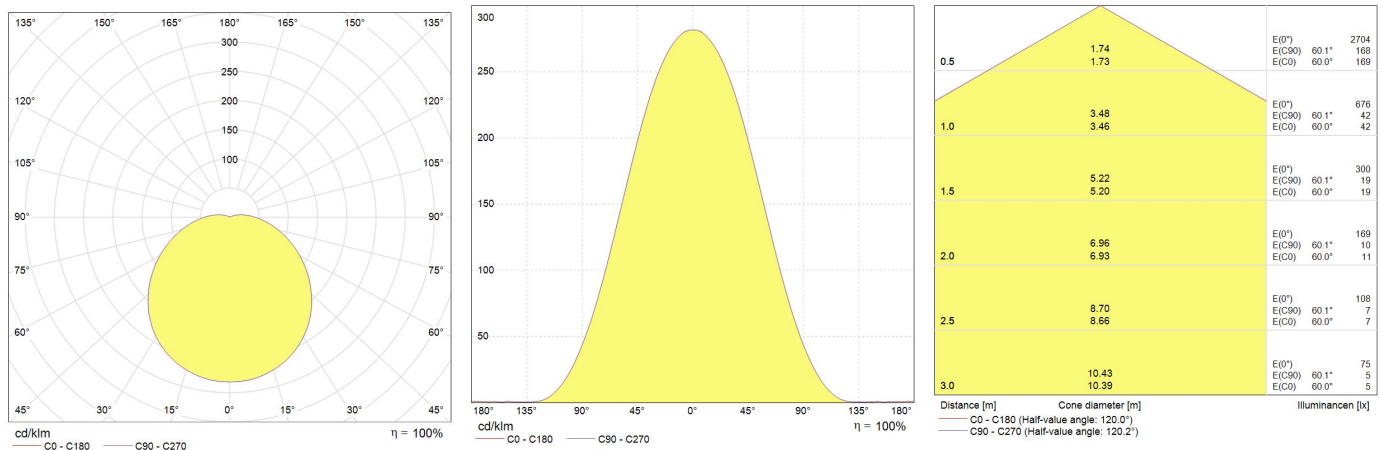

## Downloads & Links

- [Go to the catalog site \(HTTP\)](#)
- [Datasheet - TUNGSRAM \(PDF\)](#)
- [Datasheet - GE Lighting \(PDF\)](#)
- [Installation guide \(PDF\)](#)
- [Images \(HTTP\)](#)
- [Photometry files for EMERGENCY versions \(HTTP\)](#)