


## START eco Downlight 5in1 55-175 PIR

START eco Downlight 5in1 55-175 2000LM PIR  
0053394



### Product features

- START eco Downlight 5in1 is an integrated LED recessed / surface mounted downlight with built in non dimmable driver and PIR sensor. PIR sensor with time settings (3 min max) and adjustable daylight lux level. Colour temperature (3000K, 4000K and 6500K) can be chosen by a 3-way switch located on the back of the fixture. Adaptability to various cut-outs from 55mm to 175mm. 21W, 2000lm, 95lm/W, 30000hrs (L70).

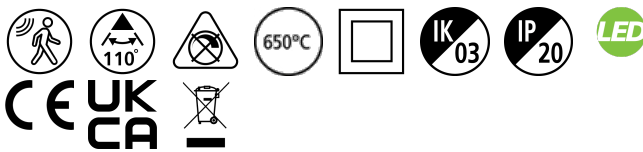

### PRODUCT OVERVIEW

IPC Code	0053394
Nom du produit	START eco Downlight 5in1 55-175 2000LM PIR
Technologie	LED
Housing	PC Polycarbonate
Montage	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
Numéro virtuel FI	4278104
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	95
Température de couleur (K)	4000
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 25
Photobiological Risk Group	RG0
Consommation électrique totale (W)	21
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Product EAN number	5410288533940

### TABLEAU DE DONNÉES

#### Données générales

IPC Code	0053394
Nom du produit	START eco Downlight 5in1 55-175 2000LM PIR
Technologie	LED
Housing	PC Polycarbonate

## START eco Downlight 5in1 55-175 PIR

START eco Downlight 5in1 55-175 2000LM PIR  
0053394

Montage	Ceiling recessed mounting
General application	Residential & Consumer
Operating temperature range (°C)	-20°C - 25°C
ETIM Class	EC001744
Numéro virtuel FI	4278104

### Données optiques

Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	95
Température de couleur (K)	4000
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

### Caractéristiques électriques

Consommation électrique totale (W)	21
Tension secteur (V)	220-240V~
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	22
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Drive current (mA)	210
Courant d'appel (A)	25
Inrush Duration (µs)	100
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	71
Max. Luminaires per 13A C Breaker	93
Max. Luminaires per 16A C Breaker	114
Max. Luminaires per 20A C Breaker	143

### Lifetime data

Performance ambient temperature Tq (°C)	25
Lifespan - L70 B50	30000

### Données physiques

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK03
Longueur (mm)	226
Largeur (mm)	226
Nominal Product Height (mm)	20
Nominal Product Diameter (mm)	226
Poids (kg)	0.465

## START eco Downlight 5in1 55-175 PIR





START eco Downlight 5in1 55-175 2000LM PIR  
0053394

Recessed Depth (mm)	50
---------------------	----

### Packaging


Description de l'emballage	Carton
Product EAN number	5410288533940
Longueur simple de l'emballage (cm)	24.0
Largeur simple de l'emballage (cm)	23.0
Packaging single depth (cm)	4.7
DUN14 (outer)	15410288533947
Units per outer package	14
Packaging outer length / height (cm)	50.4
Packaging outer width (cm)	35.8
Packaging outer depth (cm)	25.3

### PHOTOMÉTRIE

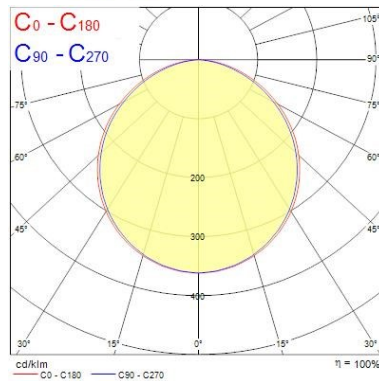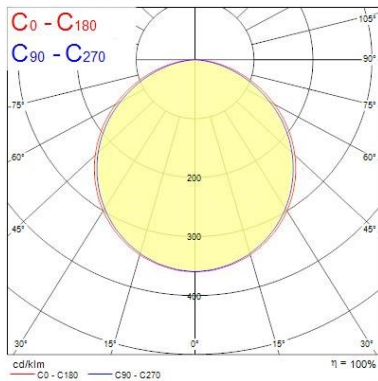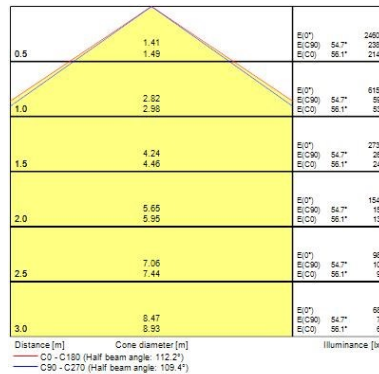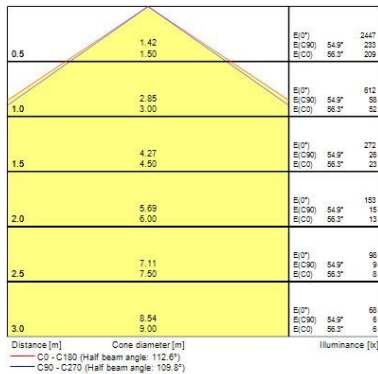


## START eco Downlight 5in1 55-175 PIR

START eco Downlight 5in1 55-175 2000LM PIR  
0053394

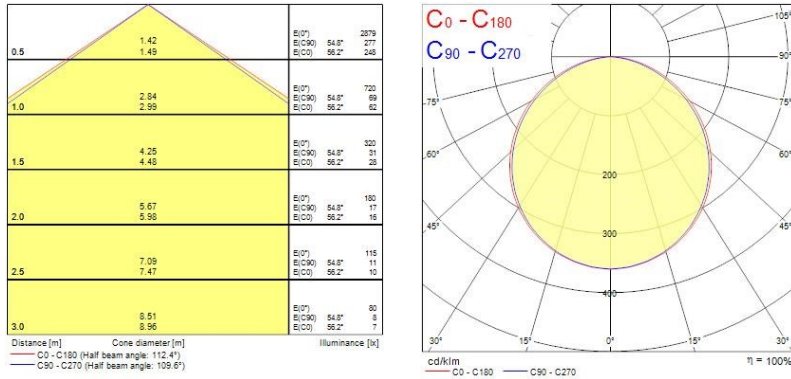


## SCHÉMAS TECHNIQUES

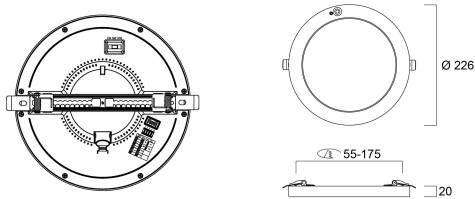


## START eco Downlight 5in1 55-175 PIR


START eco Downlight 5in1 55-175 2000LM PIR  
0053394


**SYLVANIA** 0053394

 Ce luminaire comporte des lampes à LED intégrées.


 } LED


Les lampes de ce luminaire ne peuvent pas être changées.

874/2012 

 Ce luminaire comporte des lampes à LED intégrées.

Les lampes de ce luminaire ne peuvent pas être changées.

 } LED

**SYLVANIA** 0053394 

874/2012