

POIRETTE A LED / PEAR SHAPE LED

■ T25 - non dimmable verre clair / not dimmable - Clear Bulb

CODE	REF.	Culot Base	W	W	Lm	°	°K	ENERG Y U A E I A	N°
► Ø 25 mm X h 60 mm - 230 VAC									
180590	LE 3710 NW	E14	1,4	15	120	360	3000	A++	1
180591	LE 3711 NW	B15D	1,4	15	120	360	3000	A++	2



■ T28 - non dimmable - verre clair / not dimmable - Clear Bulb

CODE	REF.	Culot Base	W	W	Lm	°	°K	ENERG Y U A E I A	N°
► Ø 28 mm X h 60 mm - 230 VAC									
180592	LE 3110 NW	E27	1,6	20	140	360	3000	A++	1
180593	LE 5511 NW	B22	1,6	20	140	360	3000	A++	2



Verre dépoli disponible sur demande / Frosted glass available upon request

T8 - TUBE LED / LED TUBE

■ TUBE LED STANDARD NON ORIENTABLE / Non adjustable LED Tube

CODE	REF.	V	W	W	Lm	°	°K	ENERG Y U A E I A
► 26 mm X L 590 mm - IRC > 80								
180613	LET 1020 NW	230	9	20	1000	240	4000	A
► 26 mm X L 1200 mm - IRC > 80								
180614	LET 1021 NW	230	18	30	2100	240	4000	A
► 26 mm X L 1500 mm - IRC > 80								
180615	LET 1023 NW	230	24	60	2700	240	4000	A



Tube PVC opale diffusant non dimmable / not dimmable diffused opal plastic tube

Utilisation de tubes LED sur une installation existante

1 - Installation équipée d'un ballast ferromagnétique + starter :

Enlever le starter existant et le remplacer par le starter fourni avec le tube à LED.

2 - Installation avec ballast électronique :

Déconnecter le ballast et le by-passer pour alimenter directement le tube. Dans ce cas, l'extrémité marquée "power" ou "input" doit être placée du côté de l'alimentation.


How to use LED tubes on an existing installation:

1 - For installation with conventional ballast + starter:

Remove the existing starter and replace it with the choke/fuse supplied along with the LED tube

2 - For installation with electronic ballast:

Disconnect the ballast and by-pass it for a direct supply. It is recommended to respect polarity: please connect the "power" side of the tube to the "LN" side of the installation.

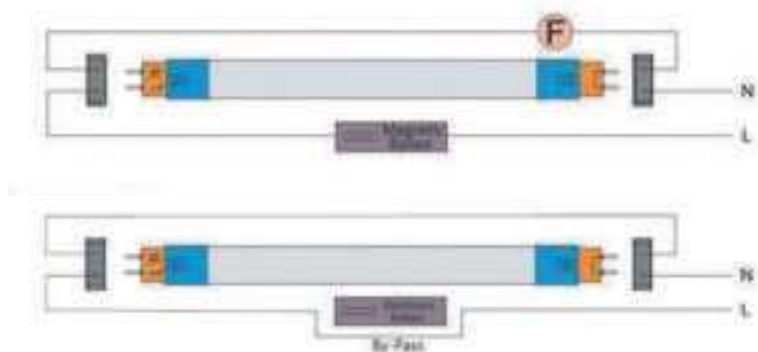

Gamme T5 LED disponible sur demande. / T5 LED tubes available upon request.