

# Luna COB 8" Downlight 35W

#### cutout 200mm

### Description

Luna COB 8" Downlight is designed to be rotatable 358° in horizontal and 60° in vertical direction, could meet various need on emitting directions. It is 35W including driver and delivers 4200lm of 80+ CRI warm white light while achieving up to 120lm/W. This outstanding performance is achieved by one 40W COB with Epistar chip. Its pending patent design especially the heat sink make sure perfect heat dissipation and low temperature on light body.



#### **Features**

- 1. Use die-casting aluminum alloy as the material of main-body.
- 2. Use high transparent PMMA as lens.
- 3. Unique and beautiful looking design.
- 4. Excellent heat dissipation performance.
- 5. Isolated driver, ensure the long life span.
- 6. Energy-saving and high efficient LED driver.
- 7.Isolated driver design.
- 8. The lamp is 358° rotatable horizontally and 30° vertically












## **Specifications**


Model #	ССТ	LED Type	Lumen(lm) (±10%)	CRI	Power(W) (±10%)	Beam angle	Current	Voltage (V)	PF
MDL8-035-AW-W-01	5000K	СОВ	4360						
MDL8-035-AW-NW-01	4000K	( Epistar	4300	>80	35W	90°	<0.40A	100-240V	>0.92
MDL8-035-AW-WW-01	3000K	chip)	4200					AC	3.02



### **Dimensions** (Unit: mm/inch)

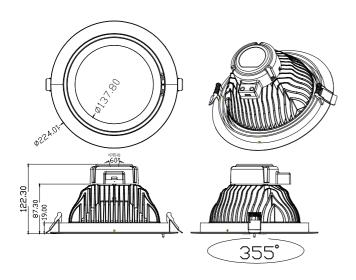

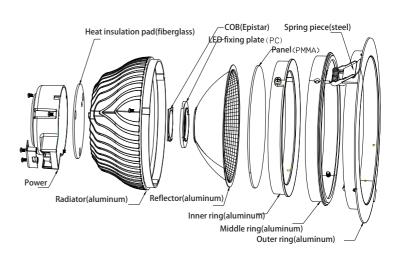

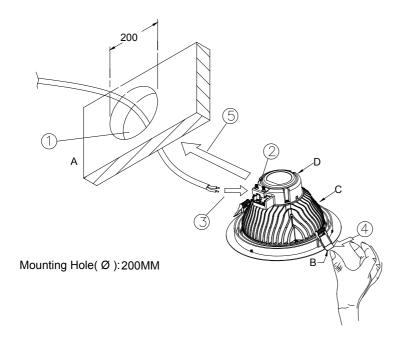

1	make a hole
2	Open driver cover
3	connect the power wire
4	push spring
5	put the lamp into the hole

Α	Wall
В	Spring
С	LED lamp
D	Driver