

Mini-Lynx® Compact Candle

CANDLE 5W/840 E14 SLV

0031087



Range features

- ML Compact 10K Candle 5W E14 840 Slv



PRODUCT OVERVIEW

Light colour	840 Cool White
Technology	Compact Fluorescent
Ordering number	0031087
Average life (Rated) (h)	10000
Energy class	A
Lamp shape	Candle
Lamp finish	Frosted
Dimmable	No
Cap/Base	E14
Type	Mini-Lynx Candle
EAN code	54 10288310879
CRI (Ra)	80
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	210
Watt (Nominal) (W)	5
Equivalent watt (W)	23
Voltage (V)	230

Mini-Lynx® Compact Candle

CANDLE 5W/840 E14 SLV

0031087

DATA TABLE

General data

Dry applications use only	Yes
Technology	Compact Fluorescent
Ordering number	0031087
Energy saving lamp	Yes
Energy class	A
Average life (Rated) (h)	10000
Average life (Nominal) (h)	10000
Lamp finish	Frosted
Lamp shape	Candle
Dimmable	No
Cap/Base	E14
Type	Mini-Lynx Candle
EAN code	5410288310879
E-number FI	4943644
E-number SE	8357838
Long description	ML Compact 10K Candle 5W E14 840 Slv
Product name	CANDLE 5W/840 E14 SLV
Lamp mercury content (mg)	<3.5
Starting time (max) (s)	< 2.0
Warm-up time to 60% of full light (max) (s)	< 60 s
Control gear required	No
Burning position	Universal
IEC Reference	IEC 60968
IEC Reference 2	IEC 60969
IEC Reference 3	IEC 55015
ILCOS code	FBABH-5/27/1b-E14-39/113
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 10000
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Optimal operating condition (°C)	25° C, cap-up, Stated lumen output may vary if operated in non-standard position

Mini-Lynx® Compact Candle

CANDLE 5W/840 E14 SLV

0031087

Optical data

Light colour	840 Cool White
CRI (Ra)	80
Colour temperature (K)	4000
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Rated) (lm)	210
Luminous flux (Nominal) (lm)	210
Chromaticity coordinate Y	0.38
Chromaticity coordinate X	0.38

Electrical data

kWh per 1000 hours burning time	5
Equivalent watt (W)	23
Watt (Rated) (W)	5
Watt (Nominal) (W)	5
Voltage (V)	230
Current (A)	0.04
Lamp power factor	> 0.5

Physical data


Weight (kg)	0.02
Lamp Length (mm) - C/L	113
Max. Lamp Diameter (mm) - D	39
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	4.10 x 4.10 x 13.60
Outer package dimensions (L x W x H) (cm)	67.50 x 28.50 x 19.60

Mini-Lynx® Compact Candle

CANDLE 5W/840 E14 SLV

0031087

TECHNICAL DRAWINGS

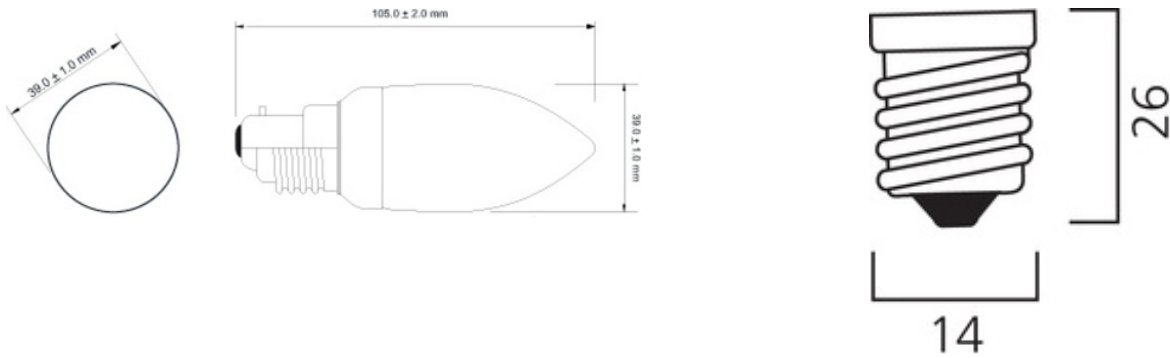

ENERGY LABEL

