

25
kWh/1000h

A
energy class

79
lumens/watt

T5 LongLast™ - High Output, G5 Cap





FT5 LL HO 24W 865 TU SL1/30
93096208

Product information

T5 LongLast™ lamps are triphosphor fluorescent lamps with 16mm outer diameter (5/8 of an inch). These lamps feature “Starcoat™ Technology” that delivers high quality triphosphor performance. GE produces two ranges of T5 LongLast™ lamps in 4 different lengths:

- High Efficiency offering high lumens per watt
- High Output offering improved lumen package

Application areas

- | | |
|---|--|
|  Retail |  Office |
|  Education |  Industrial |



Product data

Product Code	93096208
Bulb Shape	Tubular
Bulb Diameter [mm]	16
Bulb maximum overall diameter [mm]	16
Cap to Cap Length (Max) [mm]	549
Net weight per piece [g]	52
Gross weight per piece [g]	68
Mercury Content [mg]	2.5
UV radiance	Exempt
Brand	Tungsram
Cap/Base	G5

Performance data

Colour Code	865
Rated Lumens [lm]	1900
Lumen at 25°C [lm]	1600
Weighted energy consumption [kWh/1000h]	24.75
Rated efficacy [lm/W]	84
Energy efficiency class (EEC)	A
Rated Life [h]	30000
Rated median life on electronic (HF / ECG) ballast on IEC 12-hour cycle	36000
Rated median life on electronic (HF / ECG) ballast on IEC 3-hour cycle	30000
Nominal correlated colour temperature (CCT) [K]	6400
Nominal lumens [lm]	1900
Colour Rendering Index (CRI) [Ra]	85


Electrical data

Rated power [W]	22.5
Design Ambient Temperature [°C]	35
Design Lamp ambient temperature [°C]	35
Starting ambient temperature range	-15
Dimming Capability	Yes
Nominal power [W]	24


Logistic data

Shipment	Standard
DUN Code	15994100016219
EAN Code	5994100016212
Pack Quantity	30
Inner pack type	SLEEVE
Outer pack type	OUTER BOX
Layer quantity	360 EUR, 480 UK
Layer quantity EUR	360
Layer quantity UK	480
Pallet quantity EUR (PC)	3600
Pallet quantity UK (PC)	4800
Outer case size	590 x 120 x 102 (mm)
Product status	Available


Technical drawing

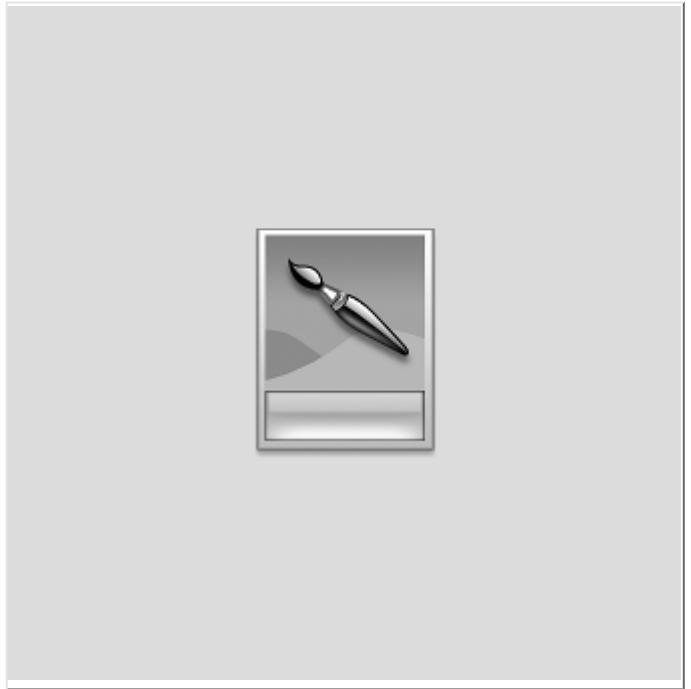


Lumen maintenance data

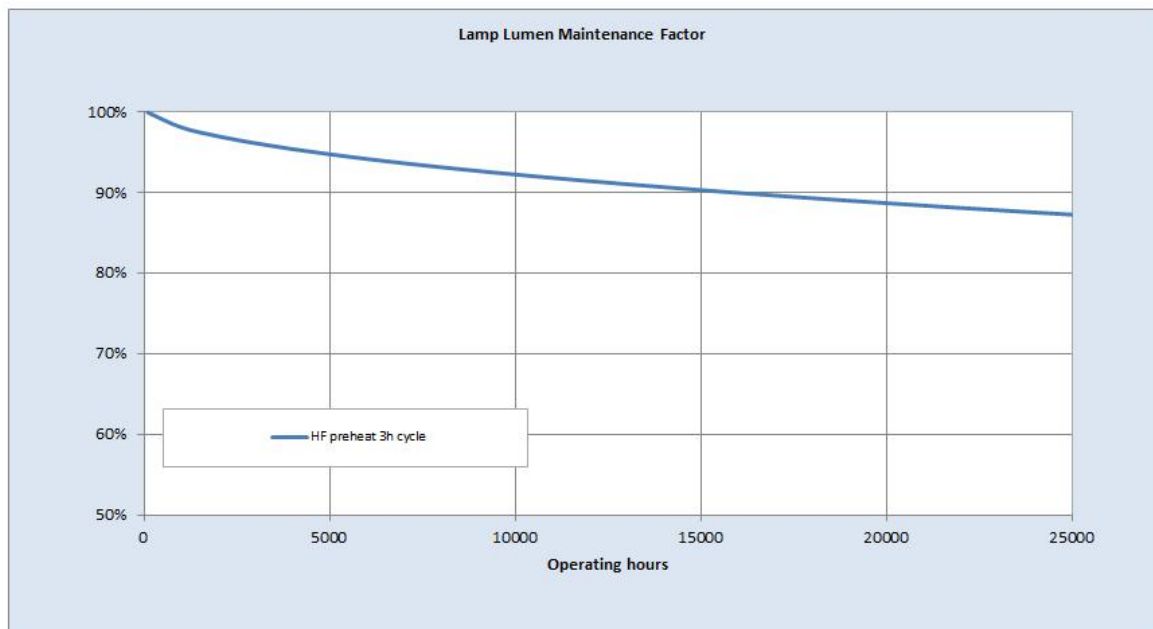

Survival data

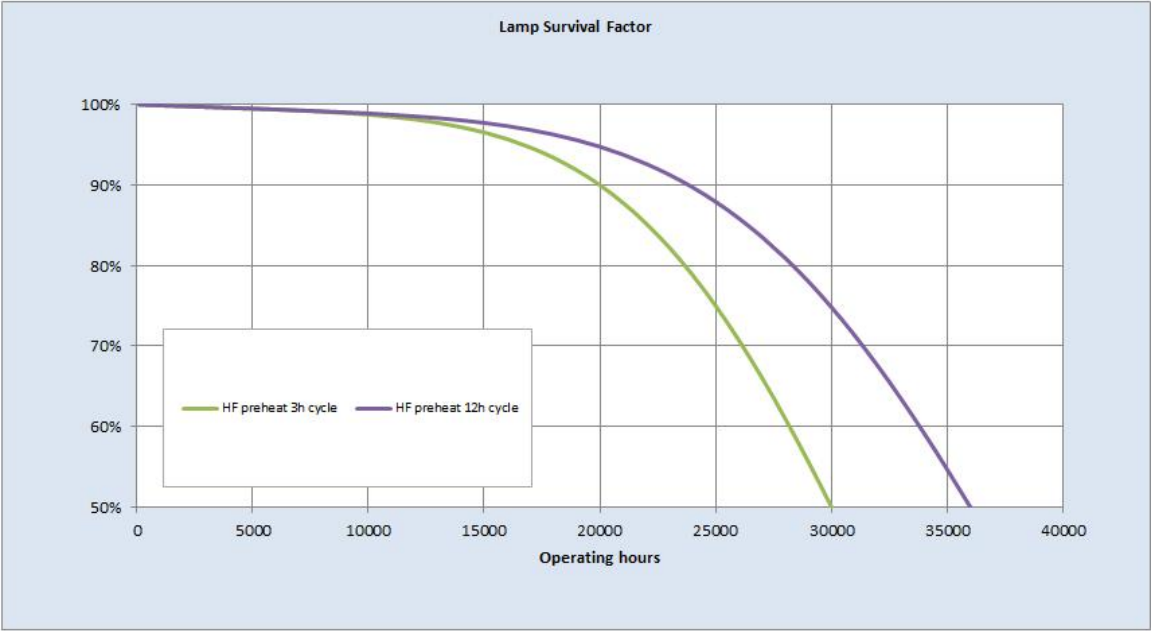

Service life data

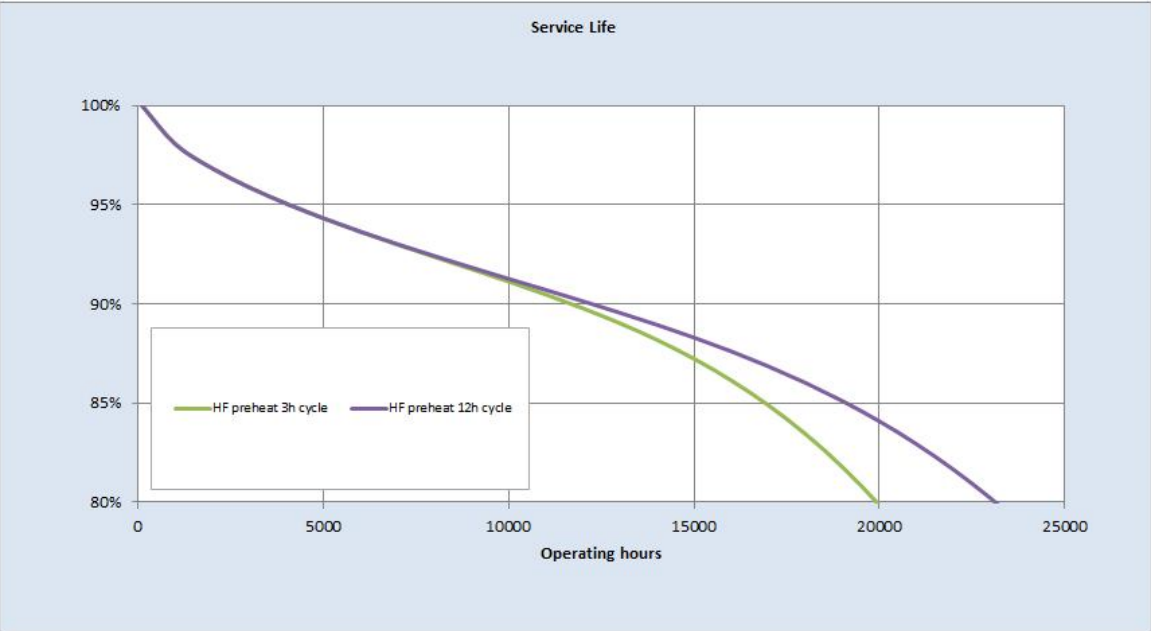

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Linear Fluorescent Lamps Catalogue \(PDF\)](#)

[LFL T5 LongLast™ Lamps - Data sheet \(EN\) \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Lumen maintenance may vary for lamps with colour temperature $\geq 5000\text{K}$