

**Logistic Data**

Article No.	43319536
Code	RL-AR111 75 DIM 930/WFL
Product EAN	4008597195365
Customs tariff no.	85395000
Box quantity (pcs.)	6
EAN Box	4008597495366
Gross weight of box in kg	1.605
Length of box in m	0.28
Width of box in m	0.19
Height of box in m	0.13
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Product status	Active

**Electric Parameters**

Lamp power	15 W
Rated wattage	15.0 W
Weighted energy consumption in 1,000 hours	16 kWh
Power factor	> 0.60
Nominal voltage	12-12 V
Nominal current	1650 mA

**Light Application Parameters**

Luminous flux	800 lm
Luminous flux in 90°-sector	800 lm
Luminous intensity	2200 cd
Beam angle	40 °
Luminous efficiency	53.33 lm/W
Colour temperature	3000 K
Colour temperature	3000 K
Colour rendering index Ra	≥ 90
Colour rendering index Ra nominal	97
Colour Stability	≤ 6 sdcm

**Service Life**

Mean service life	35000 h
Average nominal lifespan	35000 h

## Specification

Diameter max.	111 mm
Diameter	111 mm
Length max.	55 mm
Length	55 mm
dimnable	ja
Lamp shape	Reflector
Finish	glass
Degree of protection (IP)	IP20

## Notes on Operation

Ambient temperatures	-20...+40 °C
----------------------	--------------

## Notes

AR111-LED, remplacement avec 12V lampes halogènes, lumière blanc chaud, réflecteur en métal, gradable, culot G53. Lumière LED ne contient UV ou IR.

Please, refer to [www.radium.de/recycling](http://www.radium.de/recycling) for notes on disposal of burned-out lamps as well as lamp breakage. The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

## Notes

### Base



G53  
IEC/EN 60061-1  
sheet 7004-134-1


## Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.

The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

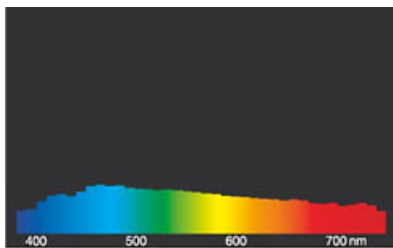

daylight(D 65)

## Special features



## General notes

For LED replacement of halogen and incandescent lamps, we recommend direct replacement (1: 1) at the respective burning position. For new systems, the number of lamps in the circuit operated at control gear such as transformers or dimmers can be obtained from corresponding compatibility lists (if available). If there is no specification for the type of device or lamp required, for safety reasons, the replacement power shall be assumed as that of the original halogen type (eg "RL-MR16 35" -> 35W, independent of the real power consumption).

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

## Safety instructions

To ensure full light efficiency and product life, the permissible temperature ranges must be observed and dry environment ensured. When operated with existing control gear, their compatibility with the lamp must be checked.

**All technical data without guarantee.**