




GE  
Lighting

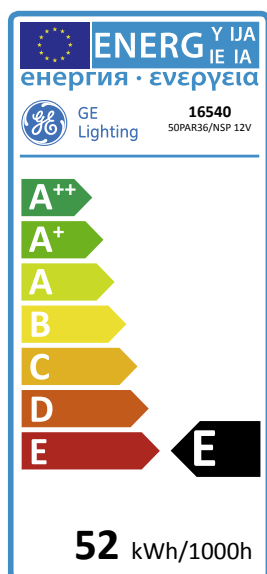

52  
kWh/1000h

E  
energy class

7  
lumens/watt

PAR 36  
50PAR36/NSP 12V

**16540**

## Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

## Application areas



Club and Disco



## Product data

Cap/Base	Screw terminal
Bulb Shape	PAR
Bulb Finish	Aluminized
Bulb Diameter [mm]	114.3
Maximum Overall Length [mm]	69.9
Net weight per piece [g]	248
Gross weight per piece [g]	250
Brand	General Electric (GE)

## Performance data

Nominal correlated colour temperature (CCT) [K]	2750
Nominal beam angle [°]	19
Nominal center beam candlepower (CBCP) [cd]	9200
Nominal lumens [lm]	330
Energy efficiency class (EEC)	E
Rated Life [h]	2000
Weighted energy consumption [kWh/1000h]	51.98

## Electrical data

Nominal power [W]	50
Nominal lamp voltage [V]	12
Coil type	C-6
Ballast Required	Yes

## Logistic data

DUN Code	43168165402
EAN Code	0
Pack Quantity	12
Layer quantity	1 UK
Layer quantity UK	1
Pallet quantity UK (PC)	1200
Outer case size	226 x 211 x 313 (mm)

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.