



Ignitor for high pressure sodium vapour and metal halide lamps

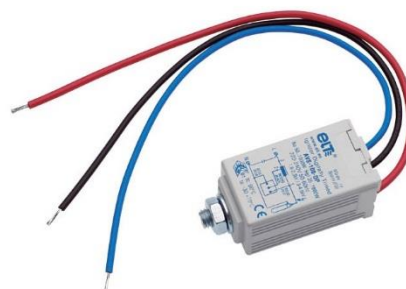

Lamps : Na 50 a 1000W
Hgl 35 a 1800W

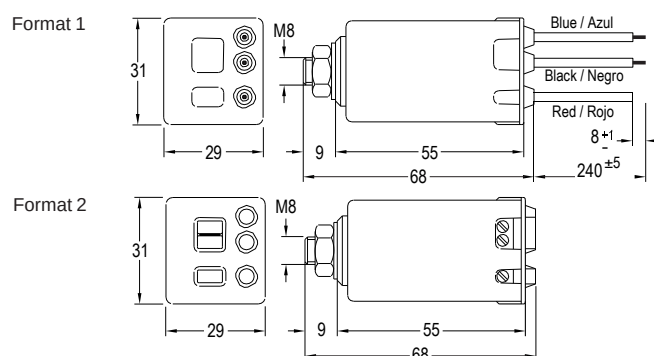



NEW PULSE-PAUSE DIGITAL IGNITOR

Model					A HQI-NAV 1.8-1/220/240 VS25 ELTLEDV
GTIN (EAN)					4058075160132
Lamp					Na 50 a 1000W Hgl 35 a 1800W
Switch-on voltage		V	≤198		
Switch-off voltage		V	>160		
Main voltage		V	220 ÷ 240		
Peak voltage		kV	1,8 ÷ 2,3 3 ÷ 4		
Impulse width at		1,6-2,5kV - μsec.	≥2		
Pulse No. per cycle		N.º	1		
Impulse position		°e	80 ÷ 100		
Load capacitance		pF	1000	2000	1500 - 4000
Losses		W	<1		
Max.temp. at tc point		tc (°C)	90		
Minimum ambient temp.		ta (°C)	-30		
Cut-off time		@50Hz - min	-	30	
Approvals					

- ~ Impulse transformer system.
- ~ Operate with ELT ballasts with an adequate outlet.
- ~ Insulating, self-extinguishing casing with M8 fastening shank.
- ~ 0.75 and 1 mm², 0.45/0.7 and 0.6/1kV connections.
- ~ Available with double insulated wires upon request.

Packaging and weight pag. 195 and www.elt.es/productos/packaging_EL.T.pdf
Product selection on www.elt.es/productos/product_fnder.html
Ignitors data pag. 134 and www.elt.es/productos/product_fnder.html

(*) AVS 100-DP / AVS 100-DP-40. Pulse-pause digital ignitor.

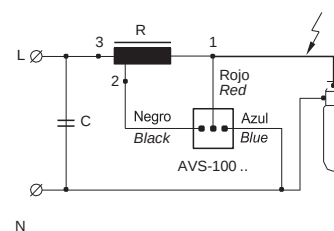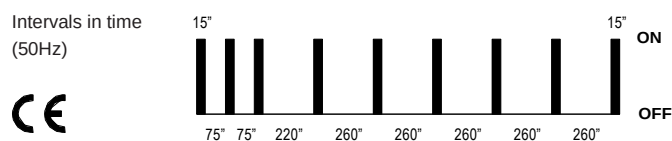

EN-61347-2-1
EN-60927

LEDVANCE			
PRODUCT		EAN 10	EAN 40
A HQI-NAV 1.8-1/220/240 VS25 ELTLEDV		4058075160132	4058075160149



LEDVANCE GmbH

Parkring 33
85748 Garching
Germany
Fon +49 89 780673 100
www.ledvance.com