


START eco Downlight 145mm Round Recessed

START eco Downlight 145 950lm 830
0053911



Product features

- START eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 12W; 950Lm; 79Lm/W; 3000K; 30,000hrs (L70B50).

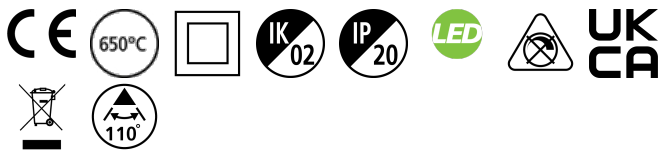

PRODUCT OVERVIEW

Product name	START eco Downlight 145 950lm 830
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Fixture luminous flux (lm)	950
Luminaire efficacy (lm/W)	79
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288539119

DATA TABLE

General data

Product name	START eco Downlight 145 950lm 830
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
Operating temperature range (°C)	0°C - 40°C
ETIM Class	EC001744

START eco Downlight 145mm Round Recessed

START eco Downlight 145 950lm 830
0053911

Optical data

Fixture luminous flux (lm)	950
Luminaire efficacy (lm/W)	79
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Beam angle (Rated) (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	12
Mains voltage (V)	220-240V~
Lamp power factor	0.5
Electrical protection	Class II
Control gear required	No
Dimmable	No
Drive current (mA)	85
Inrush Current (A)	9
Inrush Duration (µs)	180
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	109
Max. Luminaires per 13A C Breaker	142
Max. Luminaires per 16A C Breaker	175
Max. Luminaires per 20A C Breaker	220
Max. Luminaires per 10A B Breaker	64
Max. Luminaires per 13A B Breaker	84
Max. Luminaires per 16A B Breaker	104
Max. Luminaires per 20A B Breaker	131

Lifetime data

Performance ambient temperature Tq (°C)	25
Lifespan - L70 B50	30000

Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	165
Nominal Product Width (mm)	165
Nominal Product Height (mm)	38

START eco Downlight 145mm Round Recessed

START eco Downlight 145 950lm 830
0053911

Nominal Product Diameter (mm)	165
Weight (kg)	0.1


Packaging

Single packaging type	Carton
Product EAN number	5410288539119
Packaging single length / height (cm)	16.8
Packaging single width (cm)	4.5
Packaging single depth (cm)	17.0
DUN14 (outer)	15410288539116
Units per outer package	30
Packaging outer length / height (cm)	52.0
Packaging outer width (cm)	35.5
Packaging outer depth (cm)	25.0

Safety data

Optimal operating condition (°C)	0-40
----------------------------------	------


PHOTOMETRY

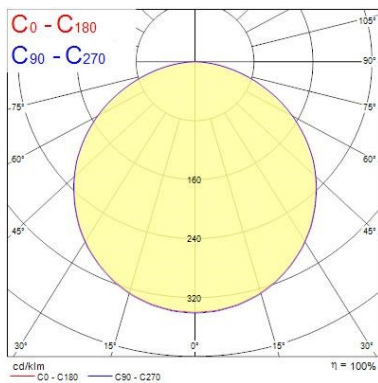

Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]
0.5	1.56	1307	57.4*	132
1.0	3.13	327	57.4*	28
1.5	4.69	145	57.4*	11
2.0	6.25	82	57.4*	6
2.5	7.82	52	57.4*	4
3.0	9.38	36	57.4*	3

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 114.8°)


TECHNICAL DRAWINGS




START eco Downlight 145mm Round Recessed


START eco Downlight 145 950lm 830
0053911


SYLVANIA 0053911


 This luminaire contains built-in LED lamps

 } LED


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built-in LED lamps

 } LED

The lamps cannot be changed in the luminaire.

SYLVANIA 0053911 

874/2012